

# CALICE Testbeam Program

Georgios Mavromanolakis (for the CALICE Collaboration)

Cambridge University  and Fermilab 

---

---

## Outline

- ▶ **General - Introduction**
- ▶ **High granularity calorimetry and CALICE**
- ▶ **Testbeam program in 2005 - 2006**
- ▶ **Plans for 2007 - 2008**
- ▶ **Summary**

# Particle flow paradigm

- ▶ .  
**try to reconstruct every particle of the event  
in order to improve the jet energy resolution**
  
- ▶ .  
**visible energy of a typical jet**
  - : ~ 60 % charged particles
  - : ~ 30 % photons
  - : ~ 10 % neutral hadrons
  
- ▶ .  
**particle flow step-by-step**
  - : use tracker to measure charged particle momentum
  - : use ECAL to measure photon energy
  - : use HCAL+ECAL to measure neutral hadron energy
  - : use tracker+ECAL+HCAL to disentangle charged from neutrals

# Jet energy resolution

particles in jet	fraction of energy in jet	detector	single particle resolution	jet energy resolution
charged particles	60 %	tracker	$\frac{\sigma_{p_t}}{p_t} \sim 0.01\% \cdot p_t$	negligible
photons	30 %	ECAL	$\frac{\sigma_E}{E} \sim 15\%/\sqrt{E}$	$\sim 5\%/\sqrt{E_{jet}}$
neutral hadrons	10 %	HCAL+ECAL	$\frac{\sigma_E}{E} \sim 45\%/\sqrt{E}$	$\sim 15\%/\sqrt{E_{jet}}$

- $\sigma_{jet} = \sigma_{charged} \oplus \sigma_{photon} \oplus \sigma_{neutral} \oplus \sigma_{confusion}$ 
  - : confusion term comes from misassignment of energy to wrong particles due to double-counting, overlapping clusters, bad track-shower reconstruction etc
  - : improve confusion term by having **better pattern recognition** → **highly granular calorimetry**

# Challenge

- ▶ **role for calorimeters**

- : not so much as efficient energy measurement devices  
but mostly as

- imaging detectors to provide excellent 3D reconstruction of showers  
for very efficient pattern recognition and particle separation

- ▶ **strong interplay between hardware and software**

## CALICE Collaboration

- ▶
  - : formed to conduct the R&D effort needed to bring initial conceptual designs for the **calorimetry** to a final proposal suitable for an experiment at the future linear collider

- ▶
  - : 30+ institutes from 10+ countries from Europe, America, Asia  
organic growth, open invitation to join

# CALICE Collaboration

## ▶ . objectives

- : build and operate very highly granular calorimeters and demonstrate proof of principle
- : do extensive individual and combined testbeam studies towards detector optimisation

## ▶ . roadmap

- : debug technology/detector concept(s)
- : detector characterisation
- : test "particle flow paradigm", interplay between hard/soft-ware
- : test-validate-improve simulation codes and shower packages

# Concepts to study

## ▶ **Si ECAL**

: Si pads and W absorber,  **$1 \times 1 \text{ cm}^2$  granularity**,  
prototype with 30 layers,  $24 X_0$ , total:  $\sim 10000$  channels


## ▶ **scint.tile HCAL**

: scintillator tiles and steel absorber, central part with  **$3 \times 3 \text{ cm}^2$  granularity**,  
 $1 \text{ m}^3$  prototype with 40 layers,  $\sim 4.5 \lambda_I$ , total:  $\sim 8000$  channels  
readout by SiPMs

## ▶ **scintillator strip ECAL**

: scint.strips and W absorber,  **$1 \times 1 \text{ cm}^2$  effective granularity**,  
prototype with 27 layers,  $27 X_0$ , total:  $\sim 2000$  channels  
readout by MPPCs


# CALICE ECAL prototype

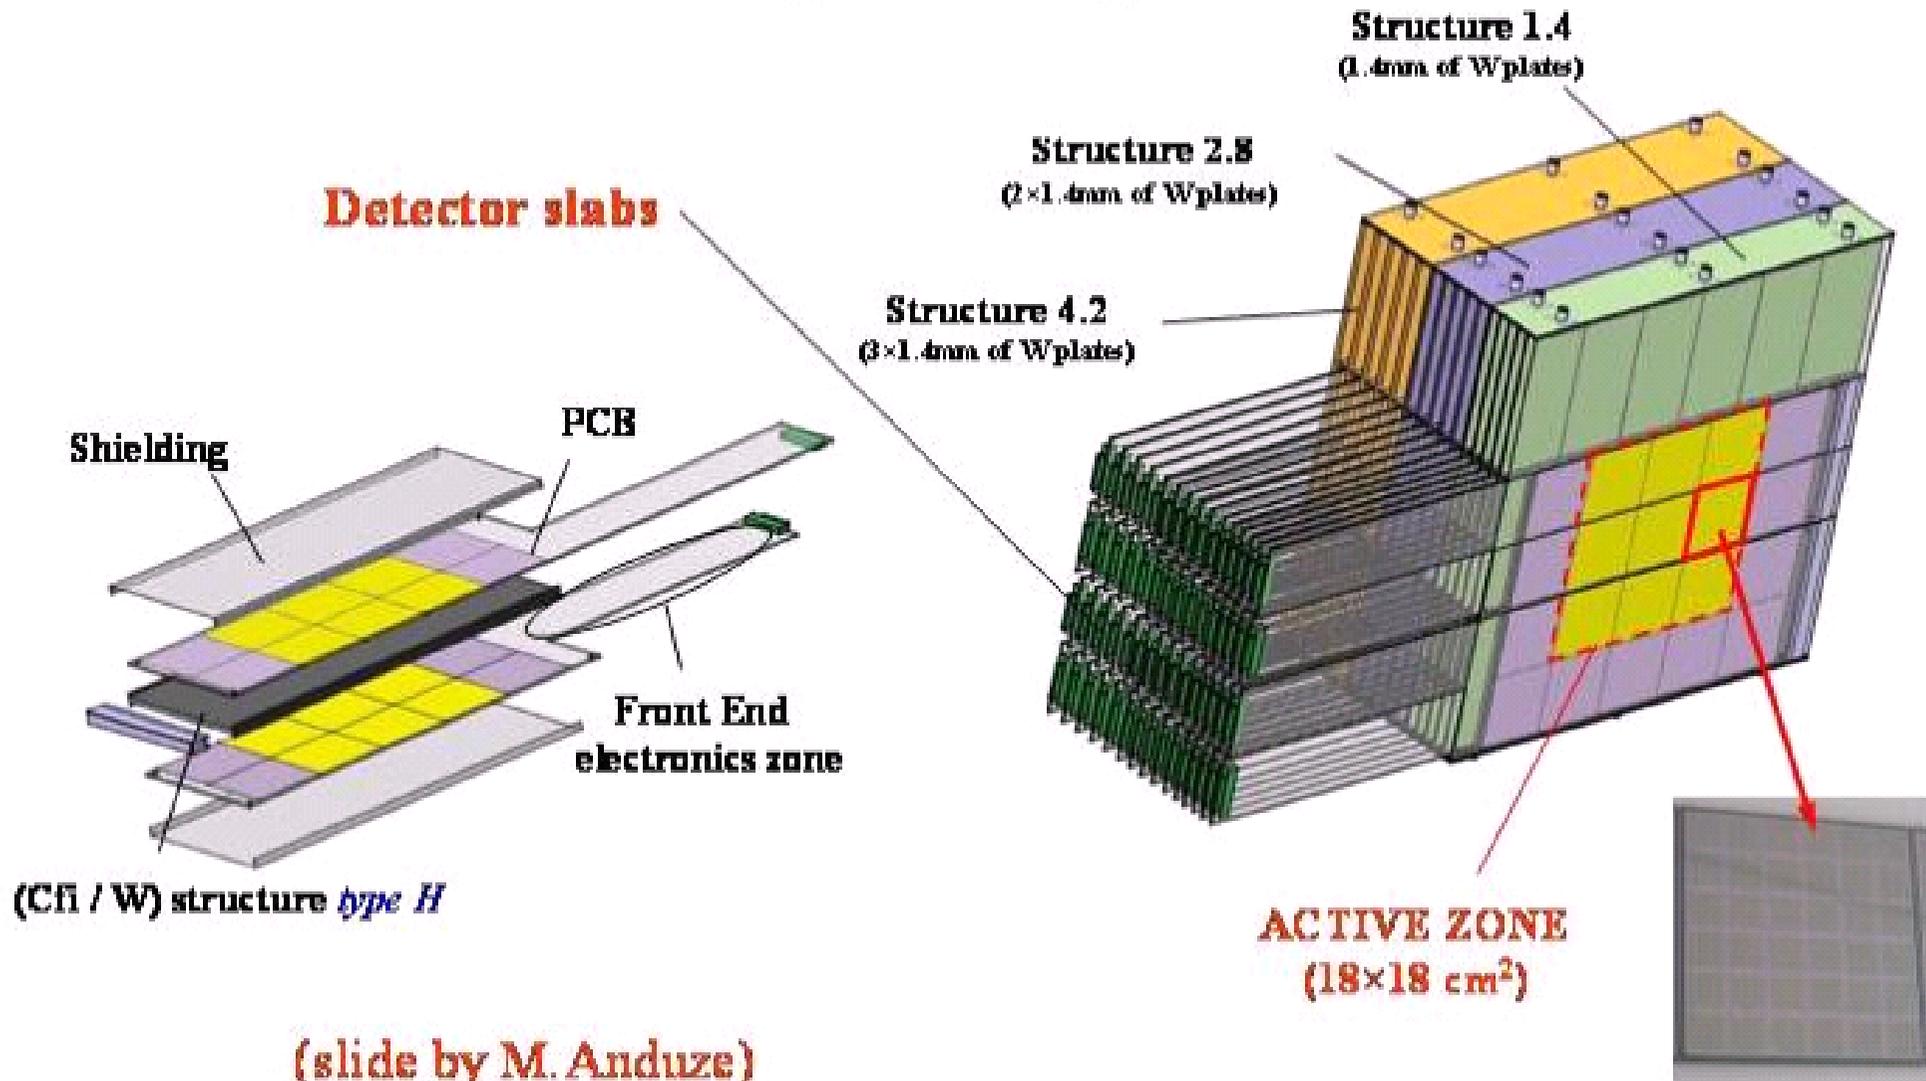


## full Si/W prototype (24 $X_0$ )

- ▷ 30 layers  $\times$  18 cm  $\times$  18 cm, interleaved with 0.5 mm Si pads
- ▷ W absorber, 10+10+10 layers, 1.4 mm:2.8 mm:4.2 mm thick per respective layer
- ▷ readout by **1  $\times$  1 cm<sup>2</sup> cells, total: 9720 channels**

# ECAL board

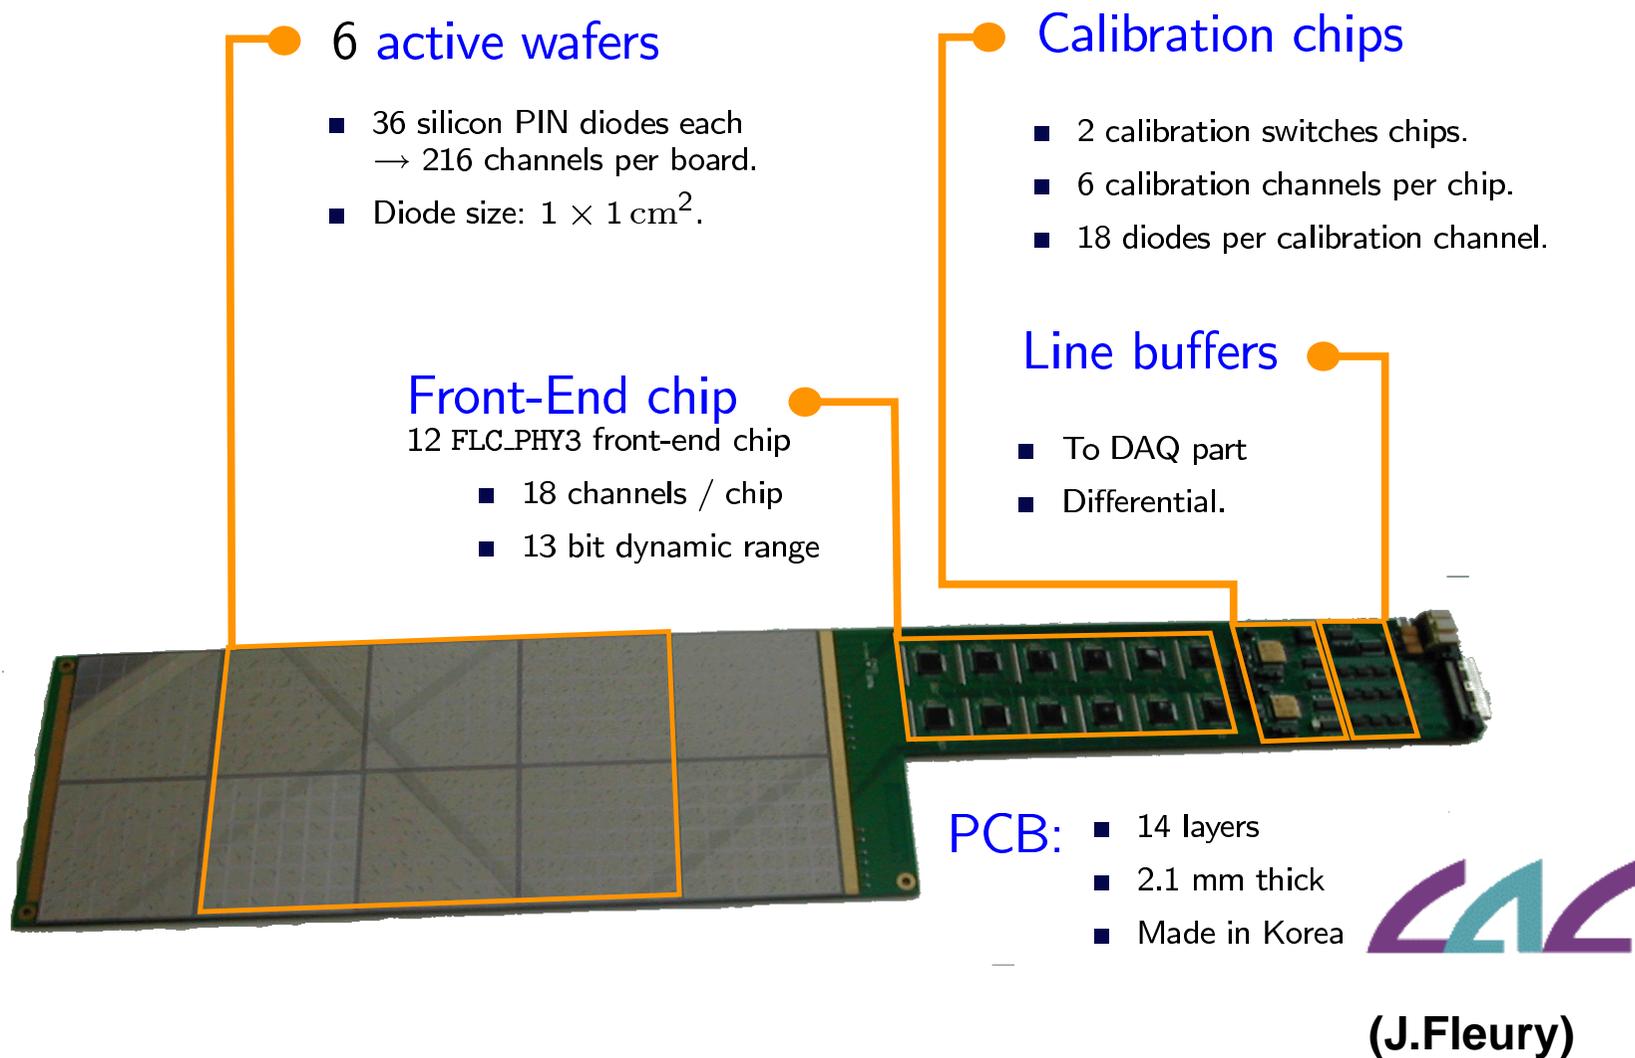


# HCAL readout chain

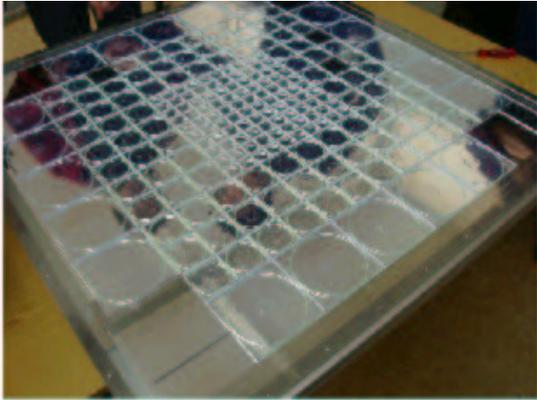



Read out 216 tiles/module  
~8000 channels




Single tile readout with  
SiPM




SiPM: pixel device  
operated in Geiger mode

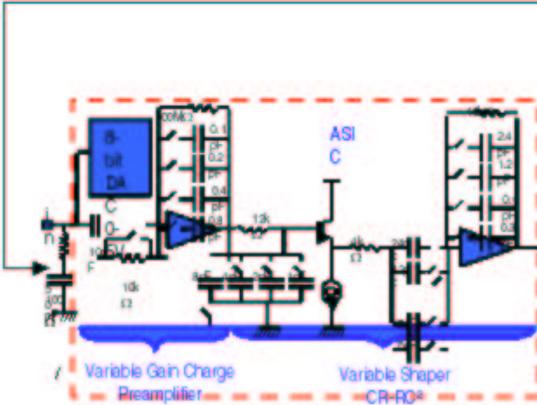

ASIC: amplification +  
shaping + multiplexing

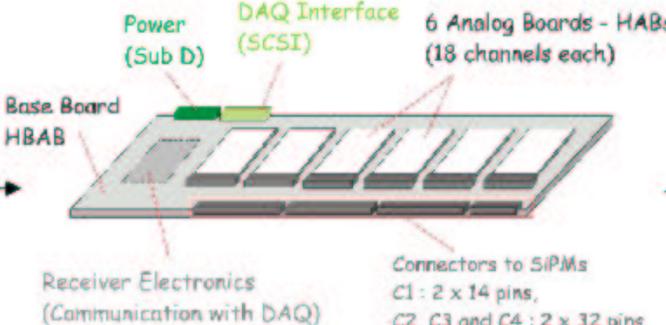

VFE: control 6 ASICs connect  
to SiPM

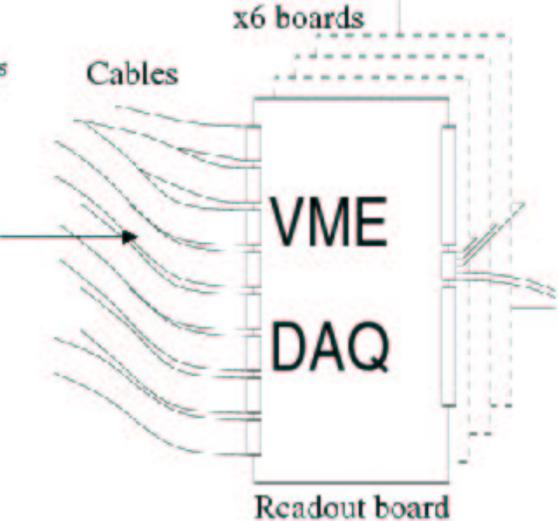

(M.Groll)


# Scintillator Strip ECAL (see talk by K.Kawagoe)

## Prototype ECAL - MPPC readout

Tungsten: 3.5mm Sci. strip: 3mm

Strip size: 1cm (width) x 4.5cm (length)

Number of layers: 27 ( $27 X_0$ )

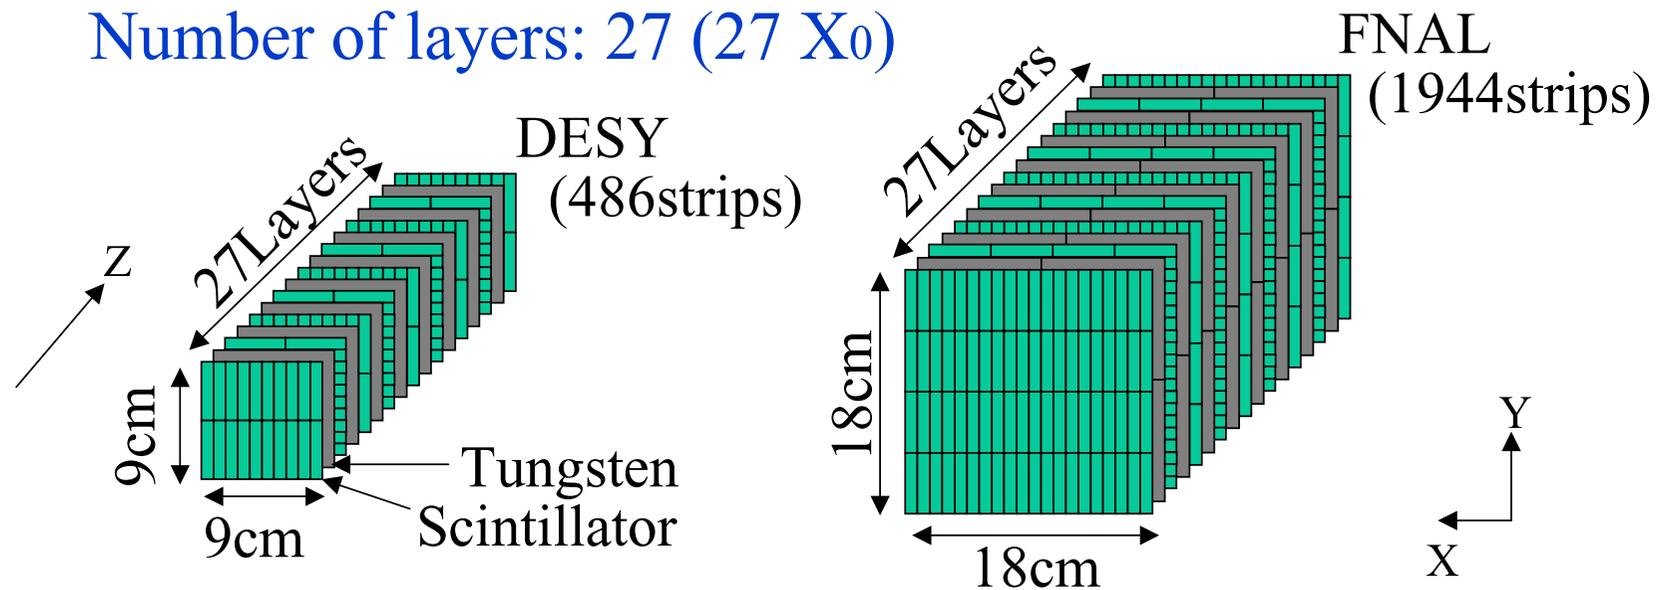

Cross section 9cmx9cm Test@DES Y(This winter)

-> In EM shower (Non linearity of MPPC)

Cross section 18cmx18cm Test@Fermilab(2007)

-> In multi particle injection /  $\text{Pi}^0$  reconstruction


(slide by T.Takeshita)

# Concepts to study (continued)

- ▶ **digital HCAL RPC**
  - : Resistive Plate Chambers and steel absorber, **1 × 1 cm<sup>2</sup> granularity**, 1 m<sup>3</sup> prototype with 40 layers,  $\sim 4.5 \lambda_I$ , total: **400000 channels**
- ▶ **digital HCAL GEM**
  - : Gas Electron Multipliers and steel absorber, **1 × 1 cm<sup>2</sup> granularity**, 1 m<sup>3</sup> prototype with 40 layers,  $\sim 4.5 \lambda_I$ , total: **400000 channels**
- ▶ **digital HCAL with microMegas**
  - : layers equipped with "Micro mesh gaseous structure" chambers, readout by pads or strips

# Digital Hadron Calorimetry

## Resistive Plate Chamber

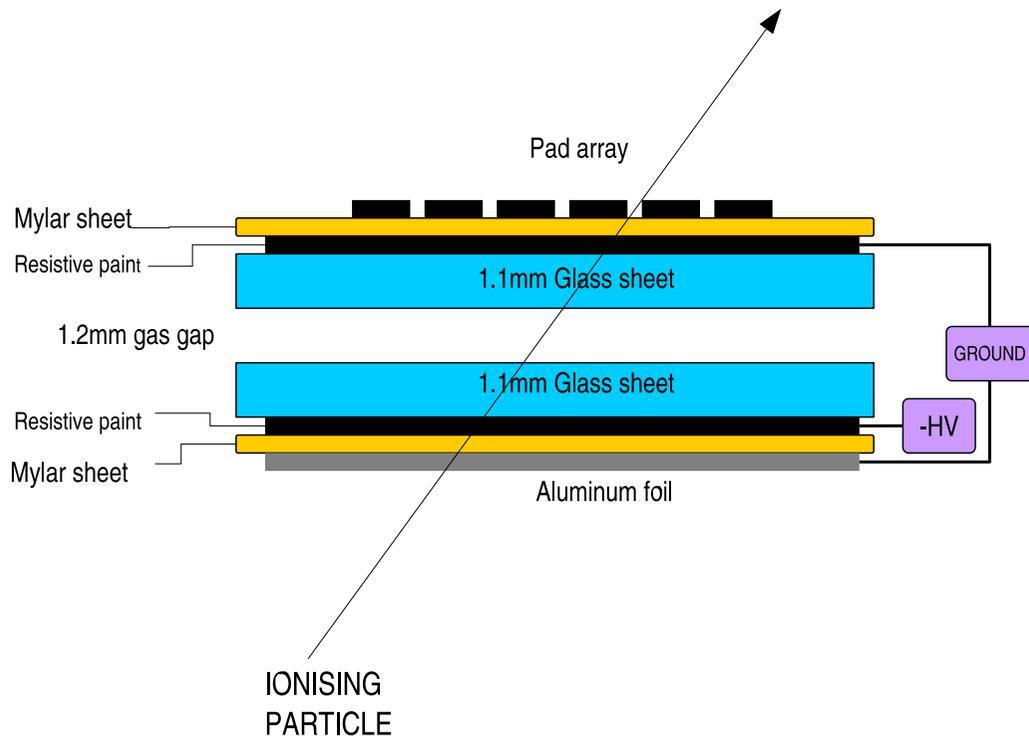

## Gas Electron Multiplier

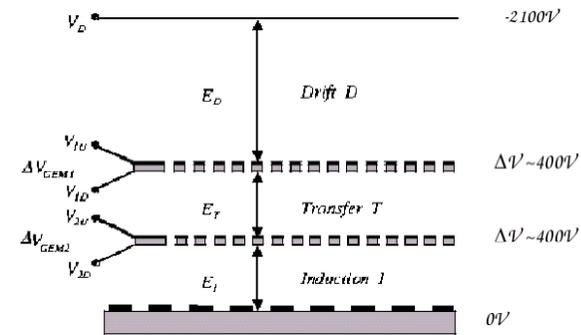


Fig. 1: Schematics of a double-GEM detector.


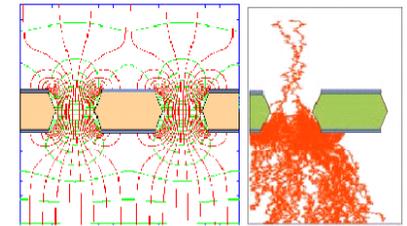


Fig. 15(a) Electric Field and (b) an analysis across a GEM channel

Coupled with a drift electrode above and a readout electrode below, it acts as a highly performing resistive plate detector. The essential and advantageous feature of this detector is that amplification and detection are decoupled, and the result is of high potential. Permitting a large transfer to a second amplification device, this opens up the possibility of using a GEM in tandem with an MSOC or a second GEM.


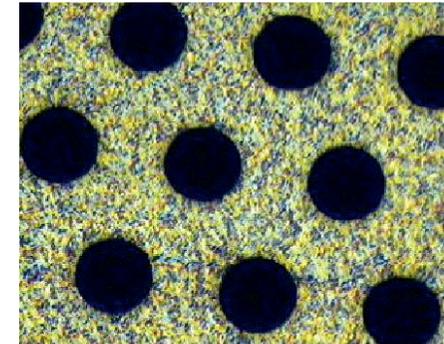


(see talk by L.Xia)

# Digital Hadron Calorimetry



## Micro mesh gaseous structure

Y.Giomataris, Ph. Rebourgeard, J.P Robert and G. Charpak  
NIM A376 (1996) 29

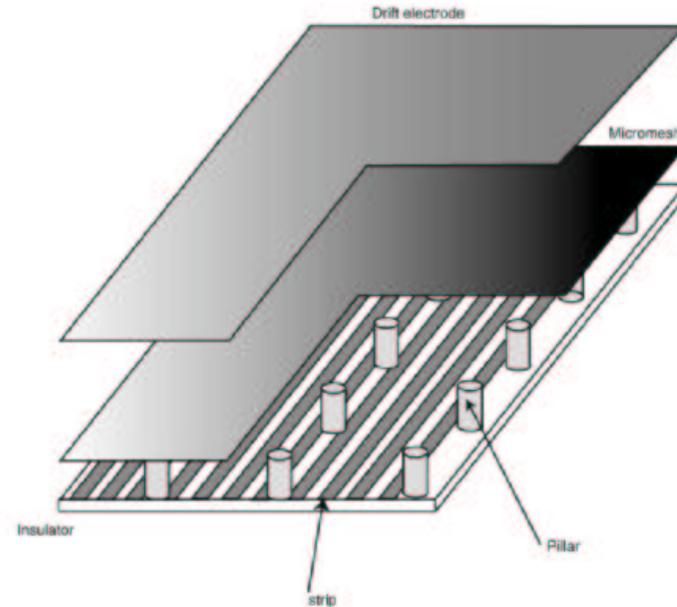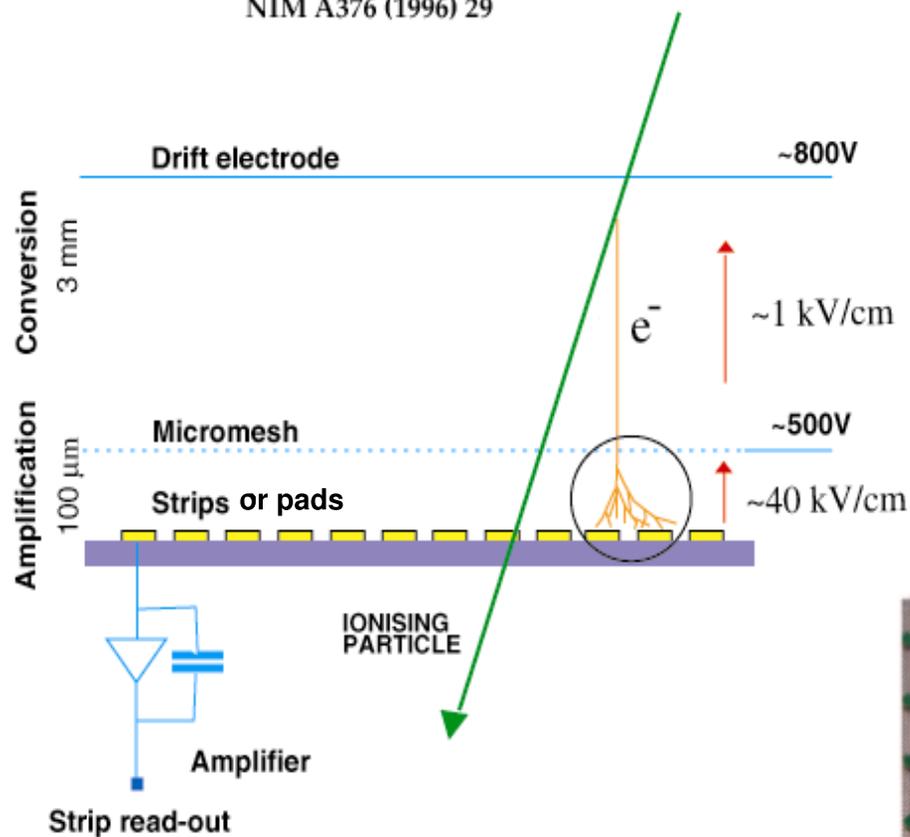

PILLARS

MICROMESH

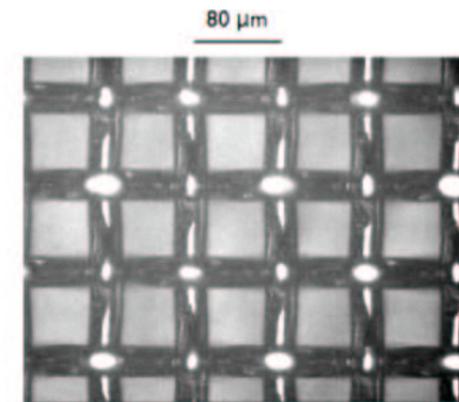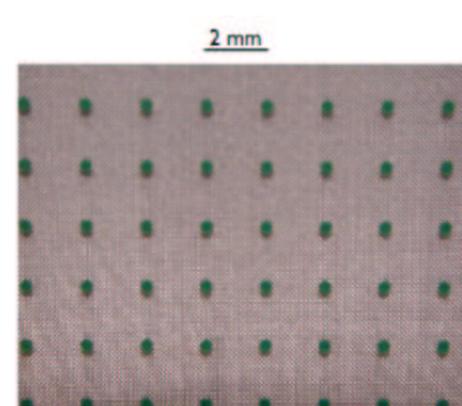

(slide by Y.Karyotakis)

# Testbeam Program - Studies

## ► . technical studies

- : production debugging, quality control
- : operation debugging
- : calibration, monitoring
- : . . .

## ► . calorimeter characterization/studies

- : energy resolution
- : position resolution
- : angular resolution
- : shower development/profiles
- : double particle separation
- : response linearity
- : response uniformity
- : particle identification
- : shower containment
- : saturation/leakage effects

# CALICE-ECAL testbeam at DESY 2005

- ▶ . **"30%" equipped Si/W prototype**


- : i.e. 14 W layers (10 at 1.4mm + 4 at 2.8mm) interleaved with 18 × 12 matrix of active Si cells, 1 × 1 cm<sup>2</sup> each, total: 3024 channels
- : first testbeam with electrons during Jan/Feb05

- ▶ . **in summary (configurations: position × energy × angle)**


- : position scan (center - edge - corner of wafers)
- energy scan (mainly 1, 2, 3 GeV, some runs at 4, 5, 6 GeV)
- angle scan (0°, 10°, 20°, 30°)
- : total: ~ 25 Mevents

# CALICE-ECAL testbeam at DESY

## ECAL

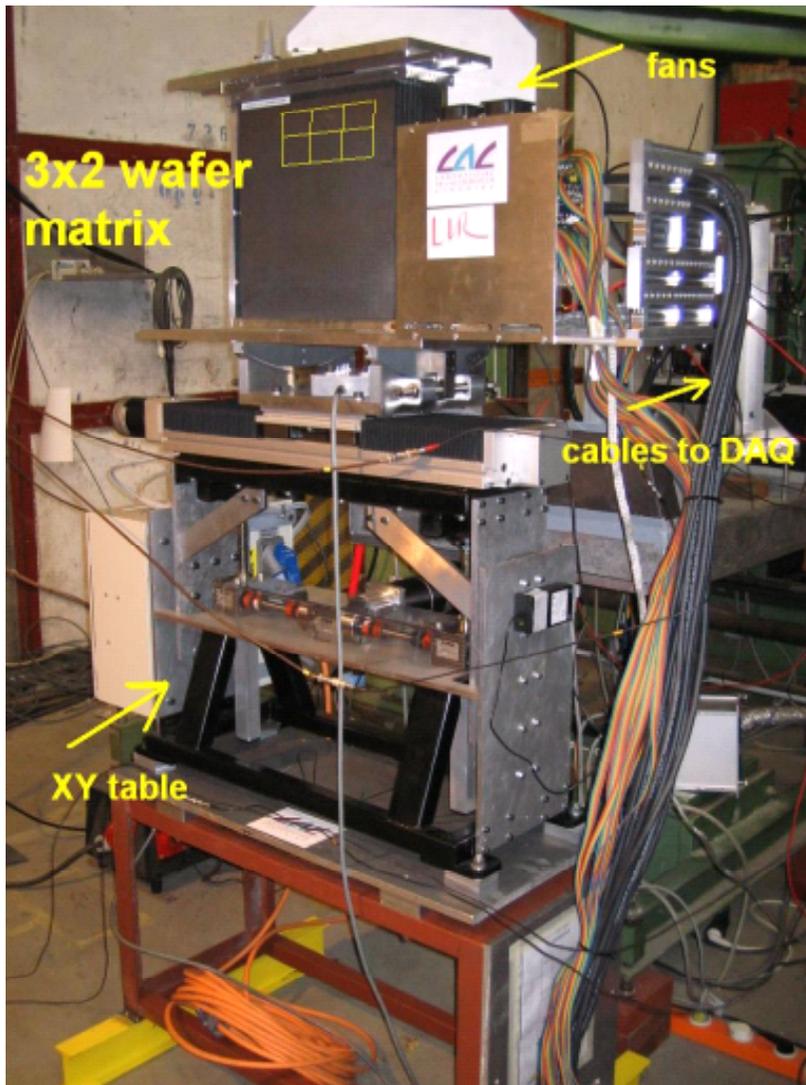


## layout at DESY T21

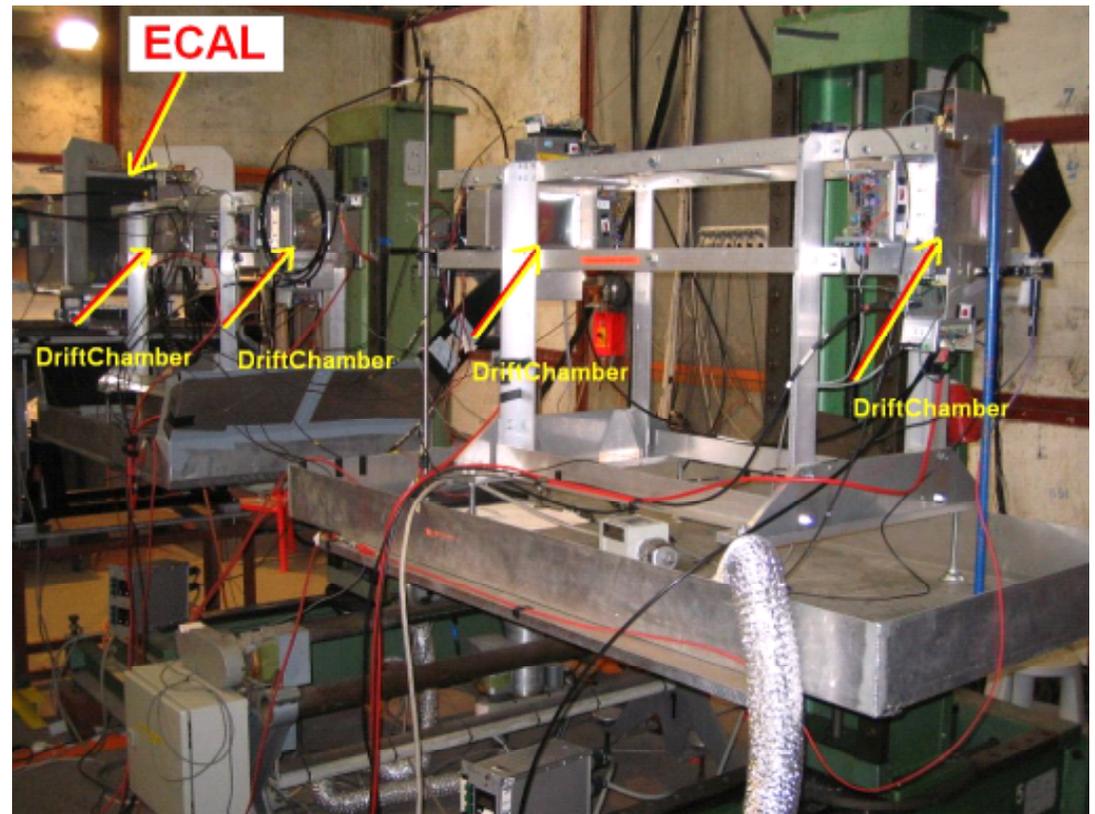

DriftChambers and installation courtesy of Tsukuba Univ. and Kobe Univ.

# "Tracking Calorimetry"

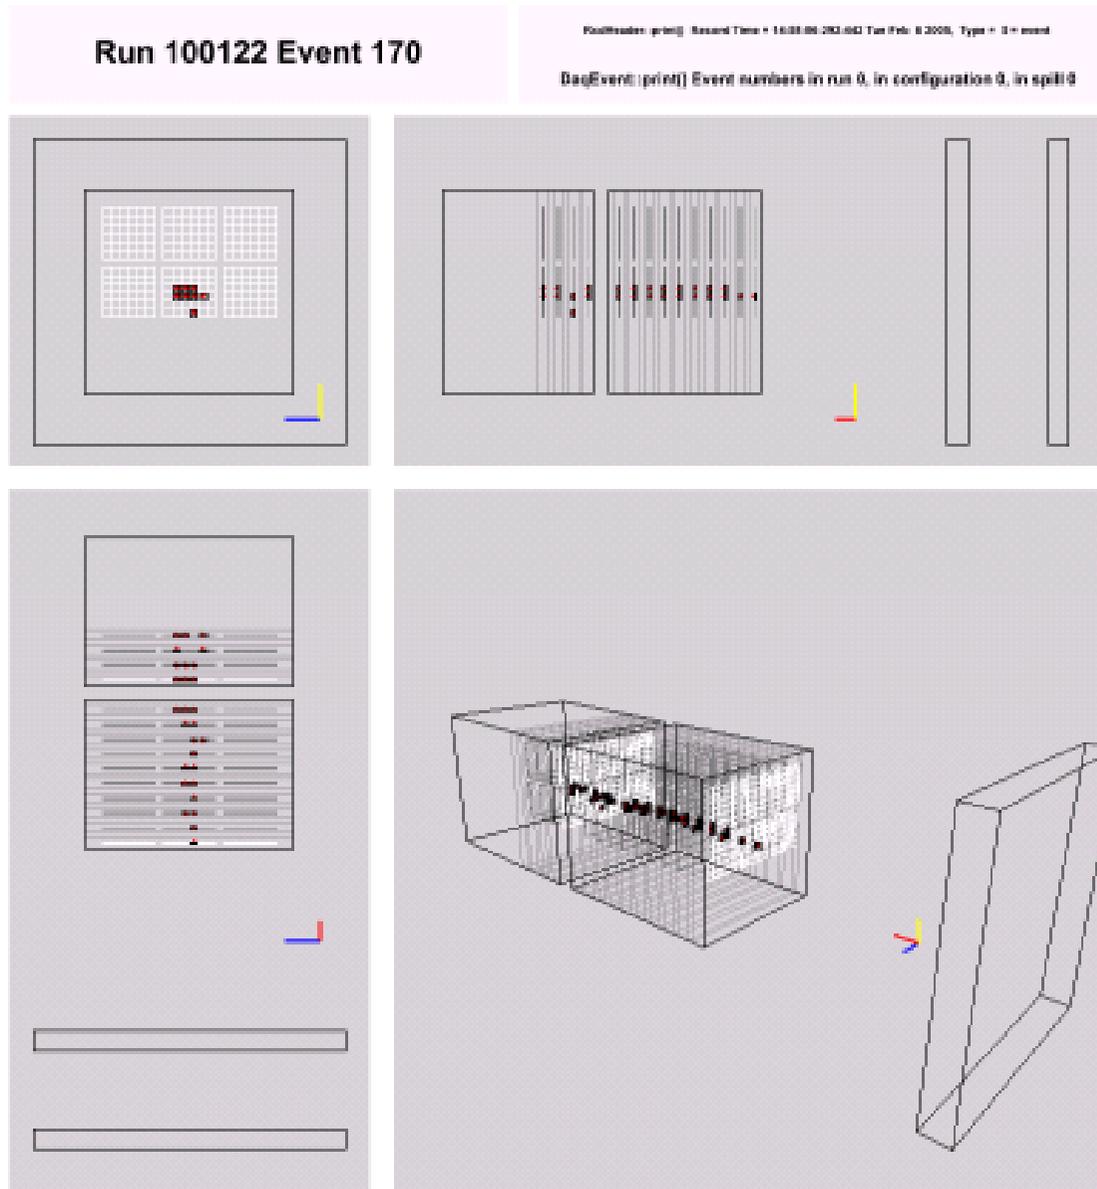


(not to scale)


$e^-$  1 GeV

cell threshold = 0.5 mip


# Position resolution

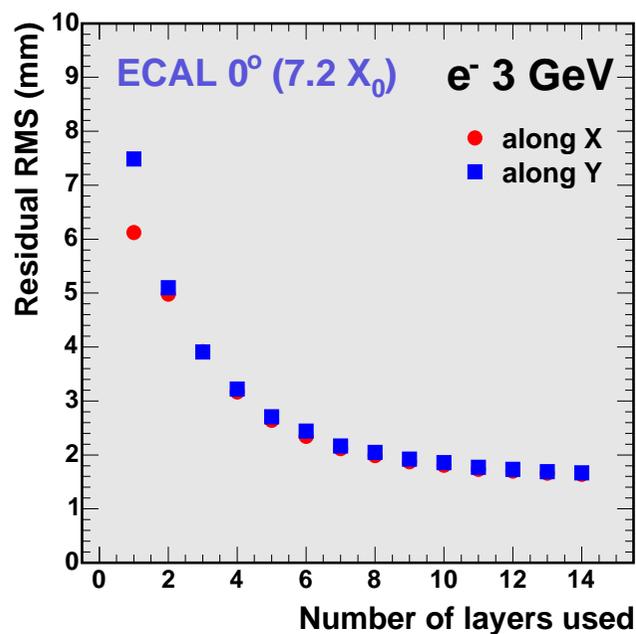

vs layers



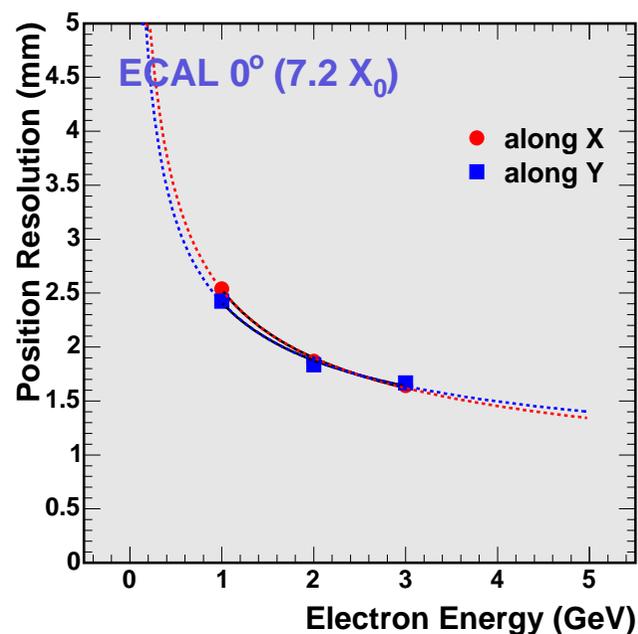


vs energy

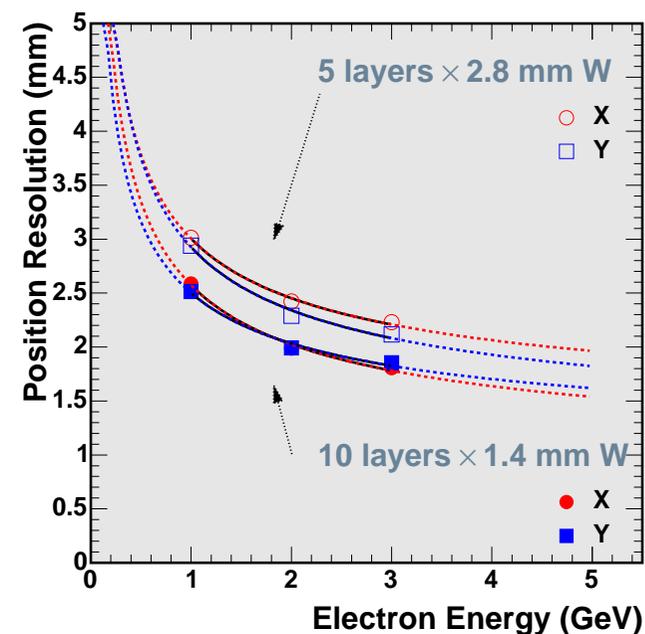


vs sampling



# Response map - center of wafer

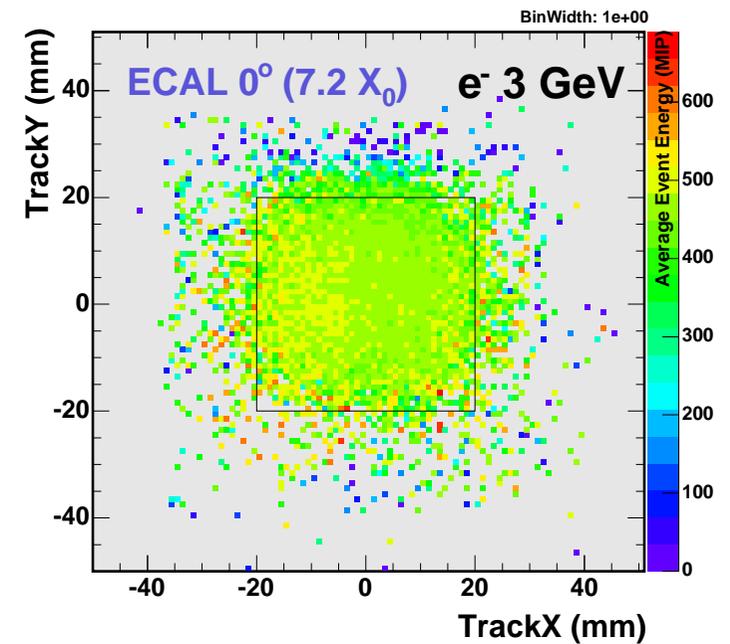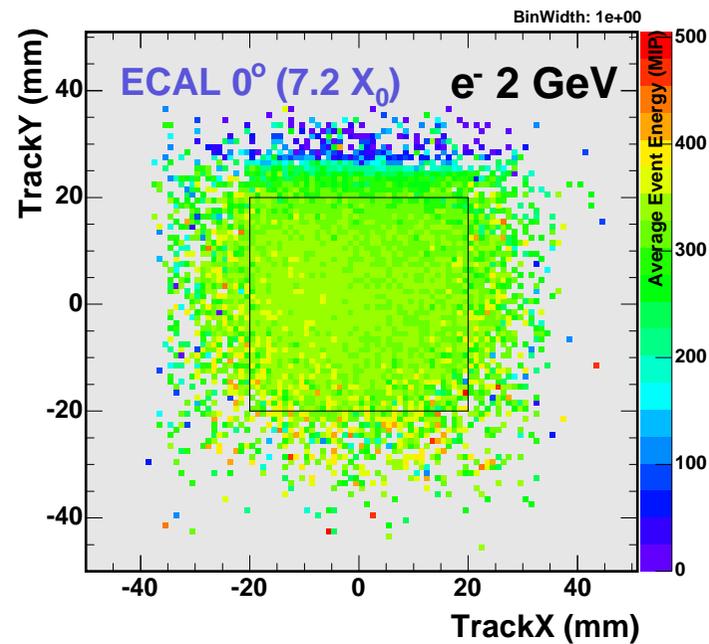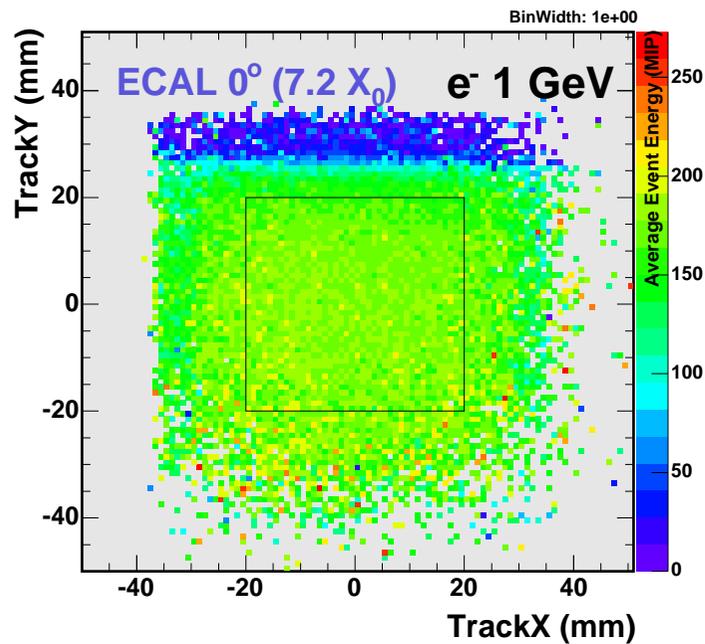

# Response map - center/edge/corner of wafer

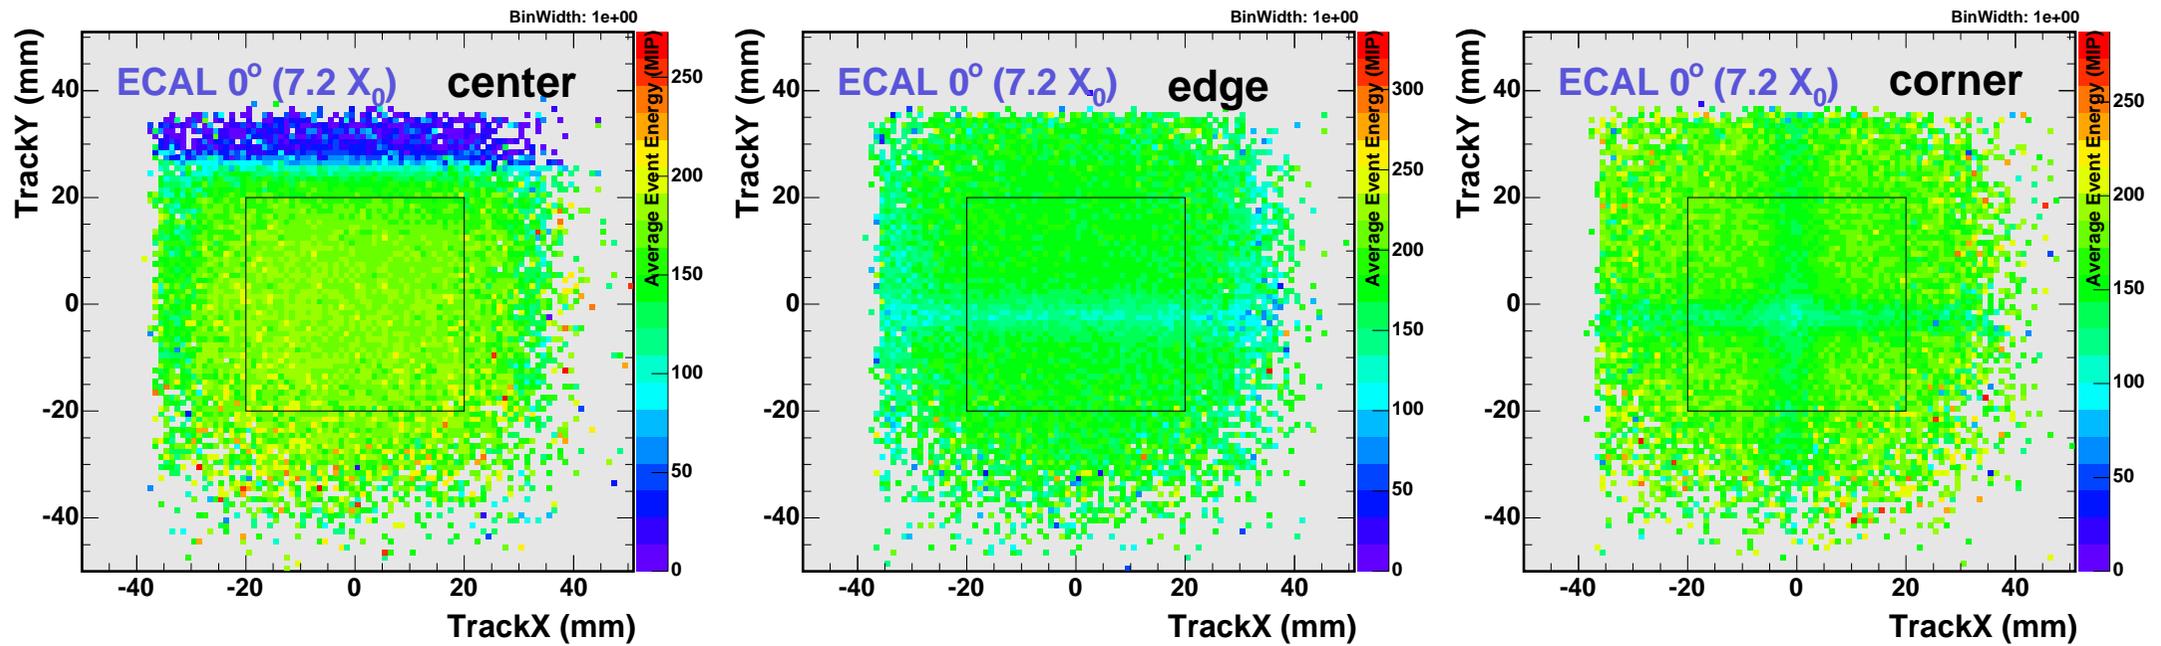



# Position scan along wafer borders

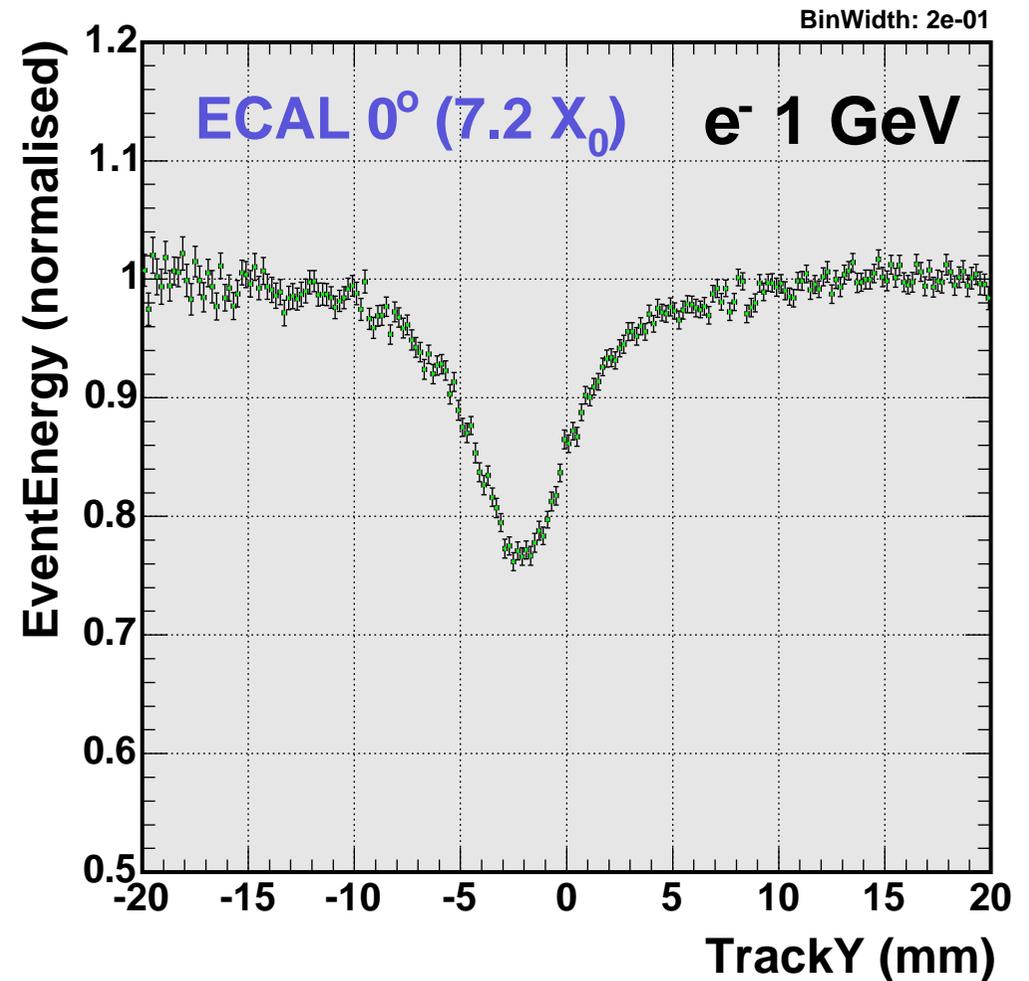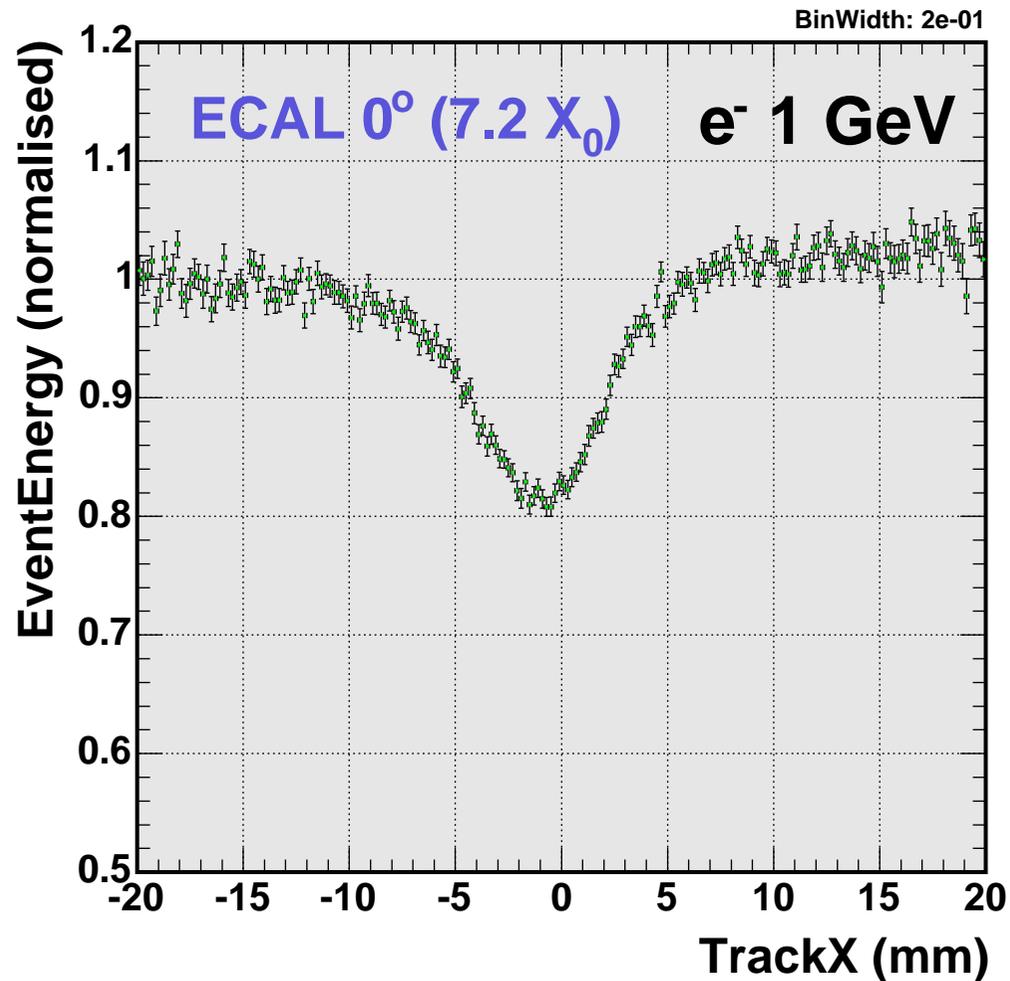

- ▷ alternate layers staggered along X (by 2.5 mm)
- ▷ dip is shallower and wider

- ▷ layers not staggered along Y
- ▷ dip is deeper and narrower

# Transverse containment (Moliere radius)

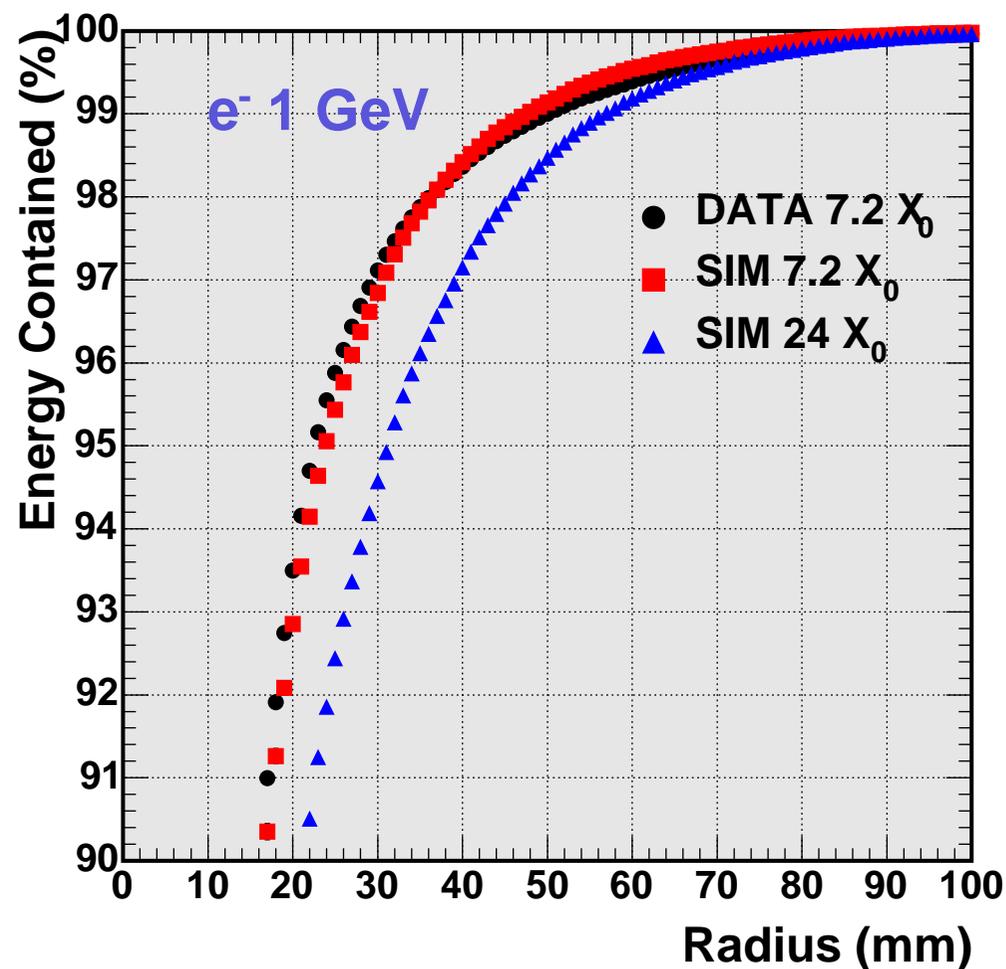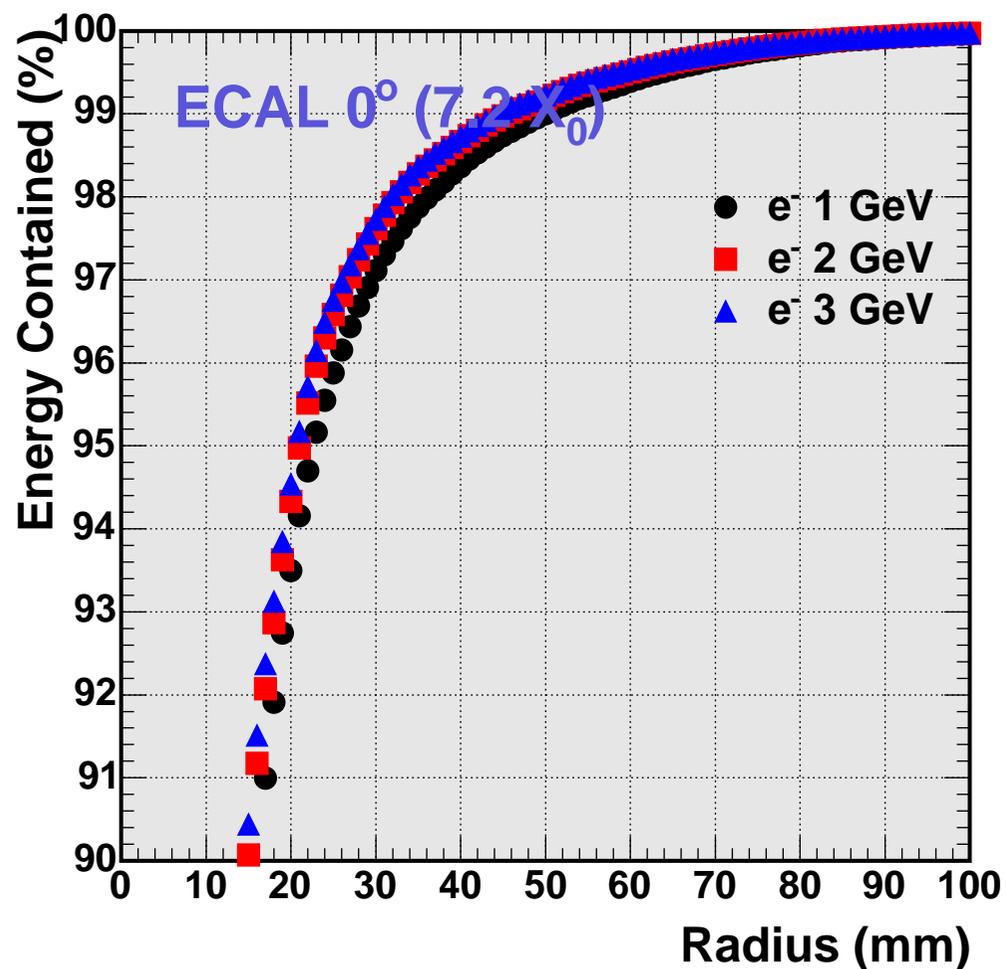

**REMINDER:** for an infinitely long and wide calorimeter  
 shower contained at 90% within radius  $\sim 1 R_M$   
 95%  $\sim 2 R_M$   
 ( for solid W,  $R_M \simeq 10$  mm ) 99%  $\sim 3.5 R_M$

- ▷ data-simulation comparison
- ▷ results expected for the 24  $X_0$  prototype

# Testbeam Program 2006

- ▶ **DESY, 22 May - 31 May**
  - : ECAL testbeam with electrons at 1-6 GeV
- ▶ **CERN, 28 Jul - 9 Aug**
  - : ECAL testbeam with electrons at higher energy
  - : HCAL, TCMT commissioning
- ▶ **CERN, 24 Aug - 3 Sep**
  - : mainly HCAL technical run with electrons/pions
- ▶ **CERN, 12 Oct - 24 Oct**
  - : combined (ECAL+HCAL+TCMT) physics run with electrons/pions

# ECAL testbeam at DESY, May 2006

## ▶ - Si/W prototype

: 24 layers (10 at 1.4mm W + 10 at 2.8mm + 4 at 4.2mm) equipped with  
18 × 12 matrix of active Si cells, **cellsize: 1 × 1 cm<sup>2</sup>**,  
total: **5184 channels**

## ▶ - in summary (configurations: position × energy × angle)

: testbeam with electrons


: position scan (center - edge - corner of wafers)

energy scan (1, 1.5, 2, 3, 4, 5, 6 GeV)


angle scan (0°, 10°, 20°, 30°, 45°)

: **total: ~ 8 Mevents**

# Testbeam at DESY with electrons

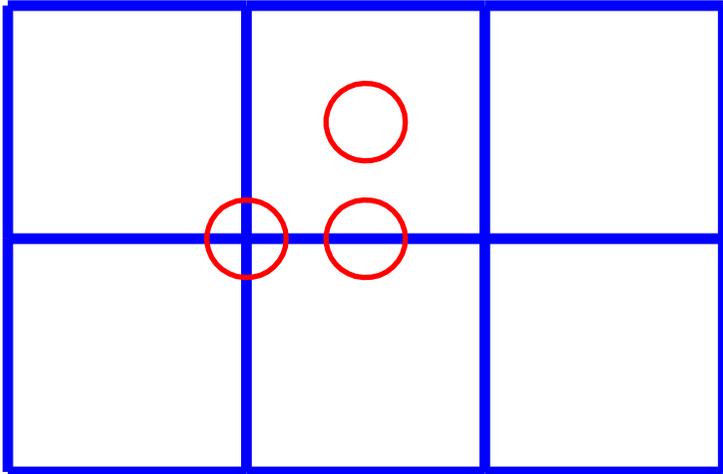


- ECAL at  $0^\circ$   
three position points
- energy scan (1, 1.5, 2, 3, 4, 5, 6 GeV)
- 100k events per sample

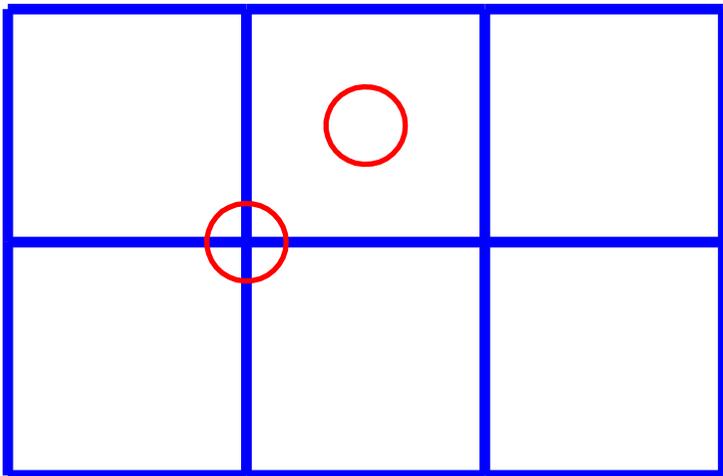



- angle scan ( $10^\circ$ ,  $20^\circ$ ,  $30^\circ$ ,  $45^\circ$ )  
two position points
- energy scan (1, 1.5, 2, 3, 4, 5, 6 GeV)
- 100k events per sample

# Response to electrons

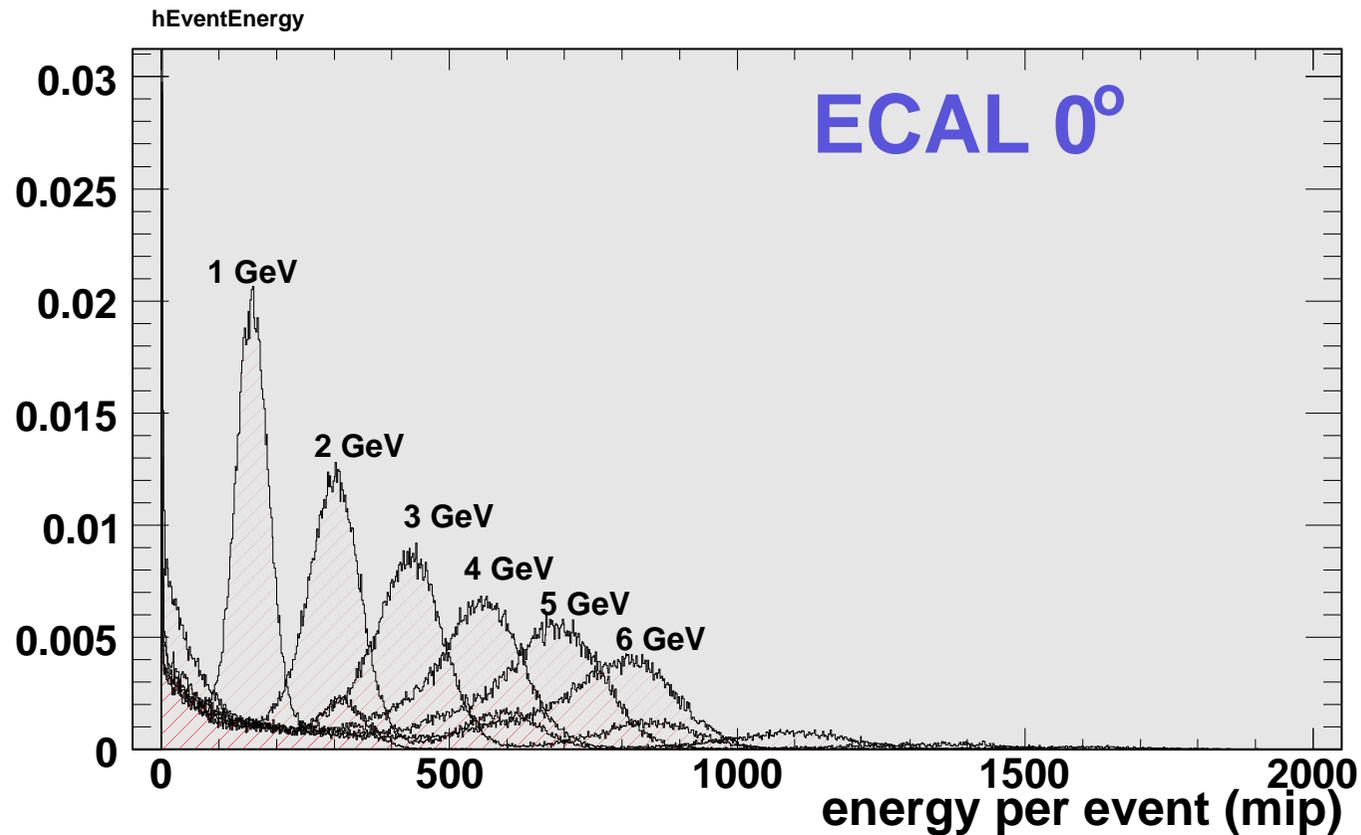

(raw data, no cleaning, no event selection)

# Response to electrons

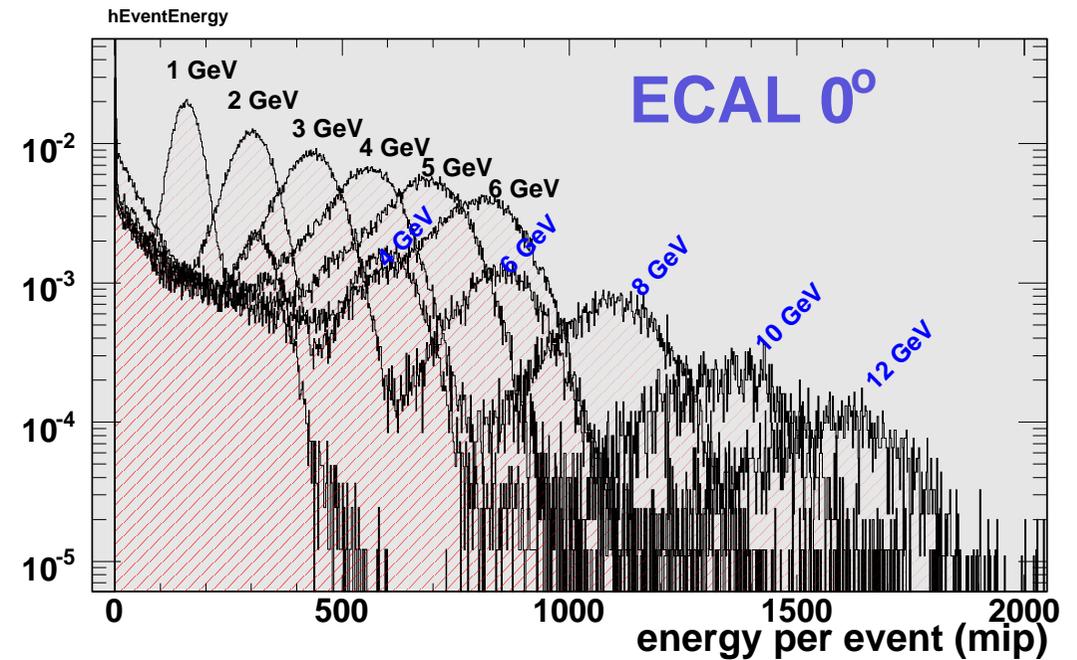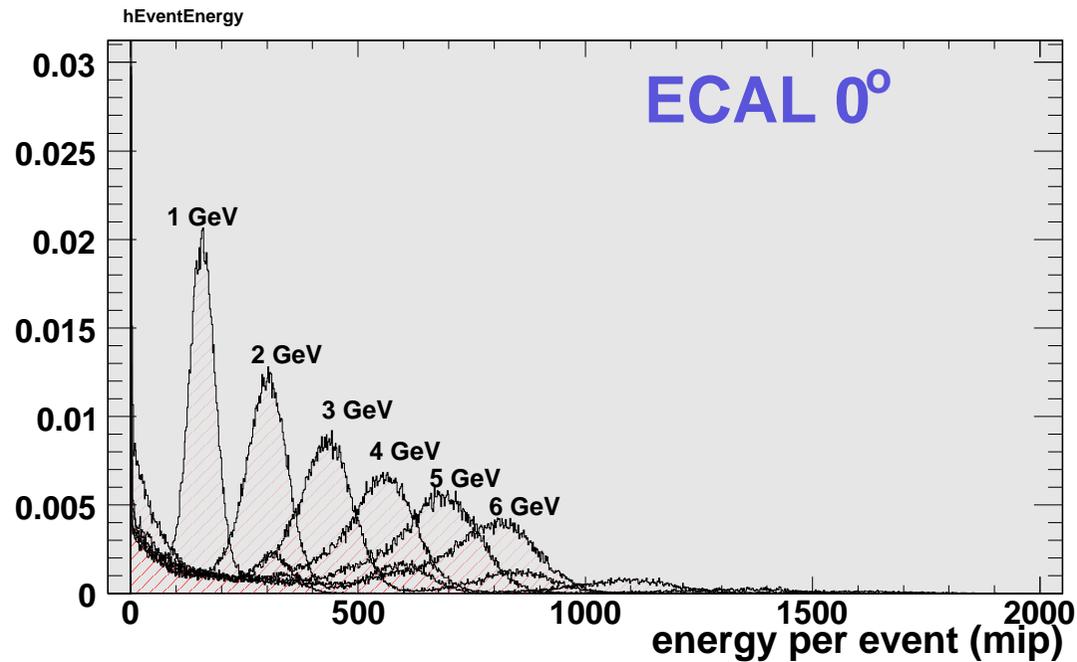


- ▷ a lot of double-particle events observed
- ▷ useful for clustering and double-particle separation studies


(raw data, no cleaning, no event selection)

# Shower longitudinal profile

## Hits per layer

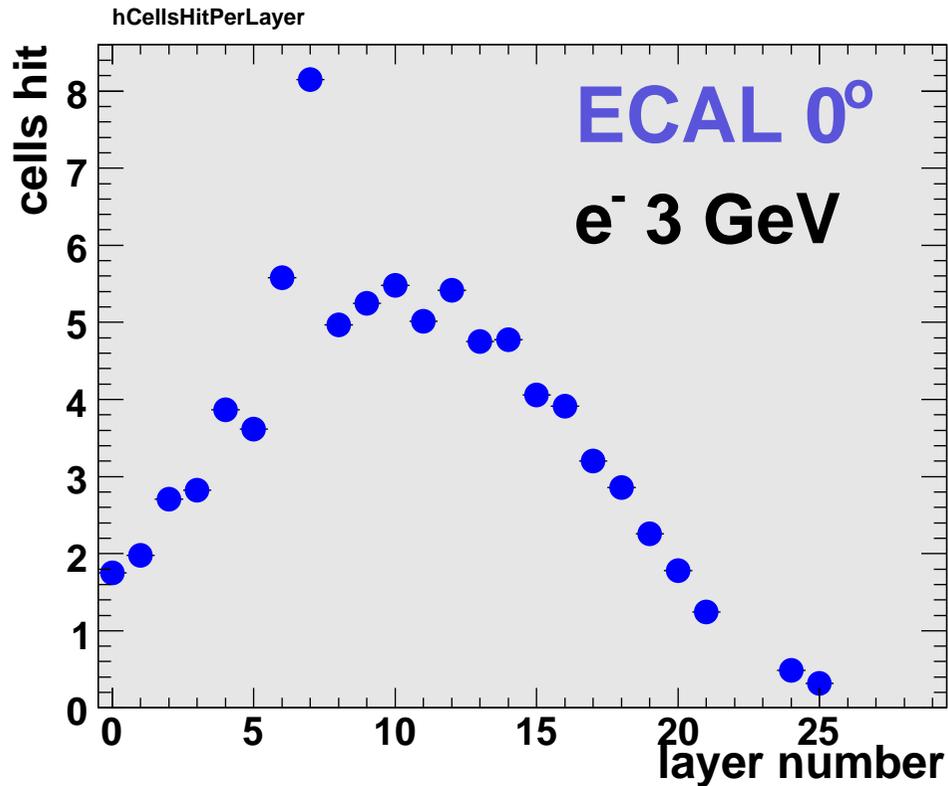

## E per layer

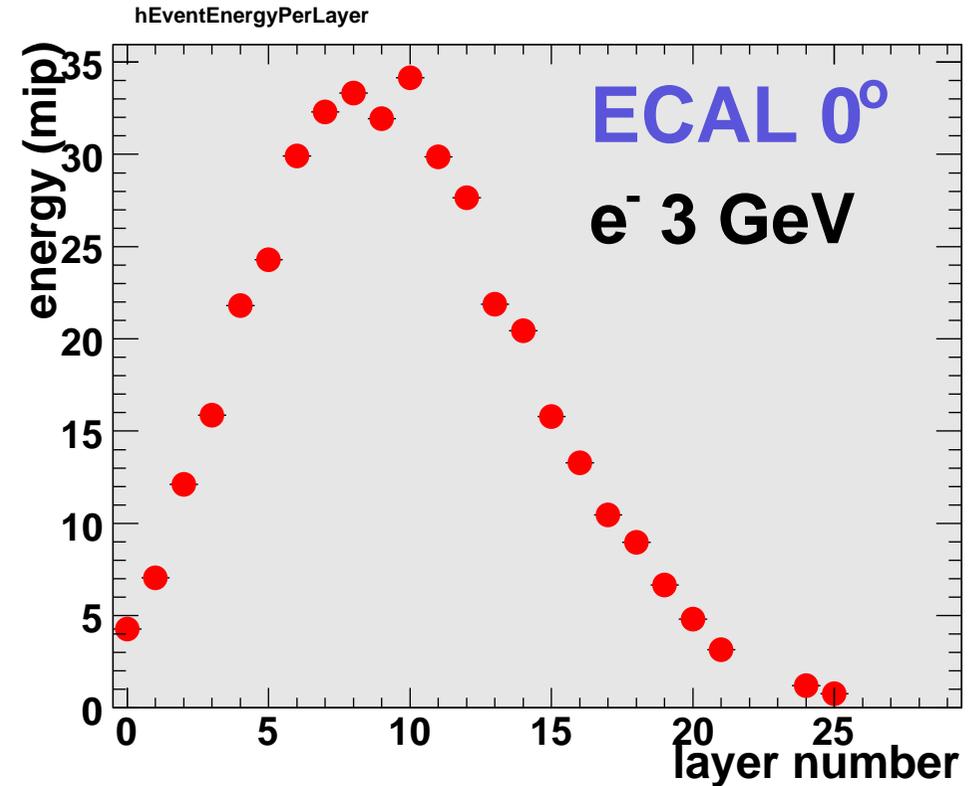

- ▷ showers are well contained
- ▷ some layers show high noise

(raw data, no cleaning, no event selection)

# ECAL testbeam at CERN, Aug 2006

## ▶ - Si/W prototype

: 30 layers (10 at 1.4mm W + 10 at 2.8mm + 10 at 4.2mm) equipped with  
18 × 12 matrix of active Si cells, **cellsize: 1 × 1 cm<sup>2</sup>**,  
total: **6480 channels**


## ▶ - run plan

: ECAL testbeam with electrons at higher energy  
: HCAL+TCMT commissioning  
: beam tuning


## ▶ - **CANCELLED**

: CERN suffered a severe power failure, all testbeams cancelled

# CALICE Testbeam at CERN 2006

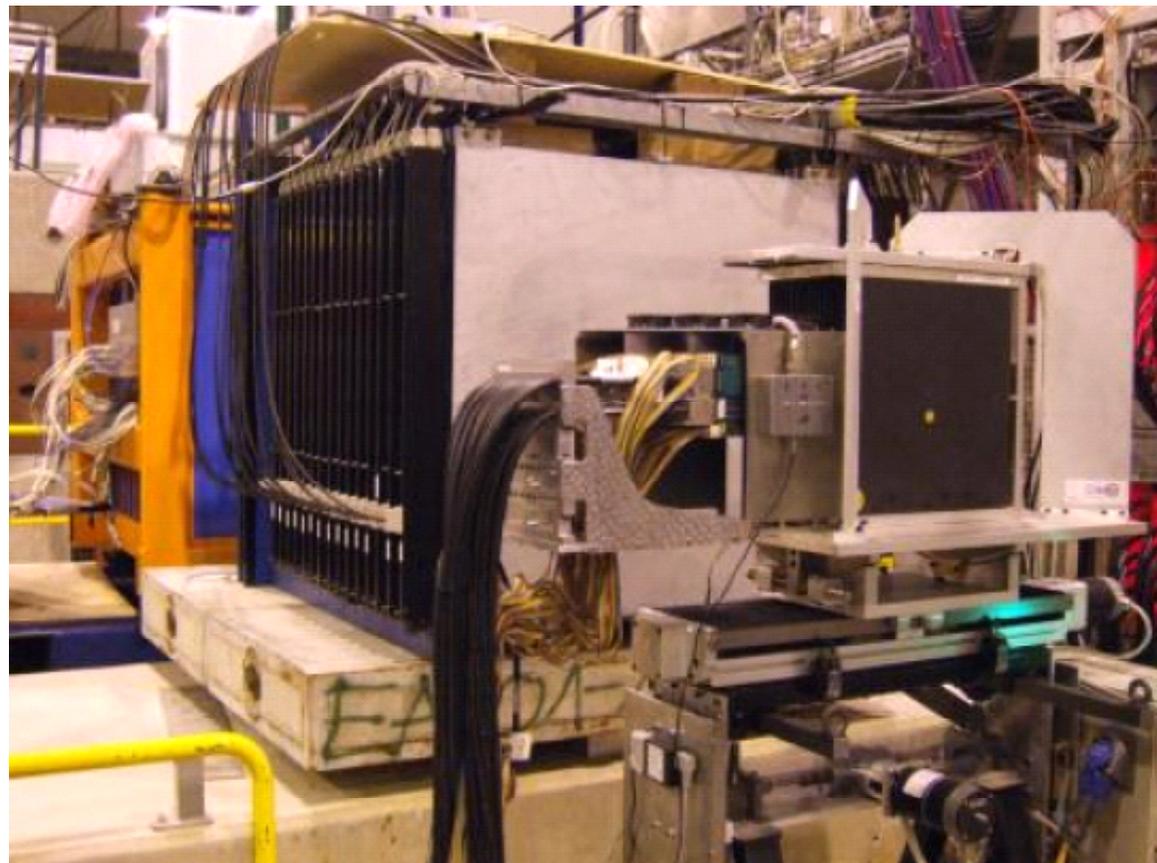

(perspective view)

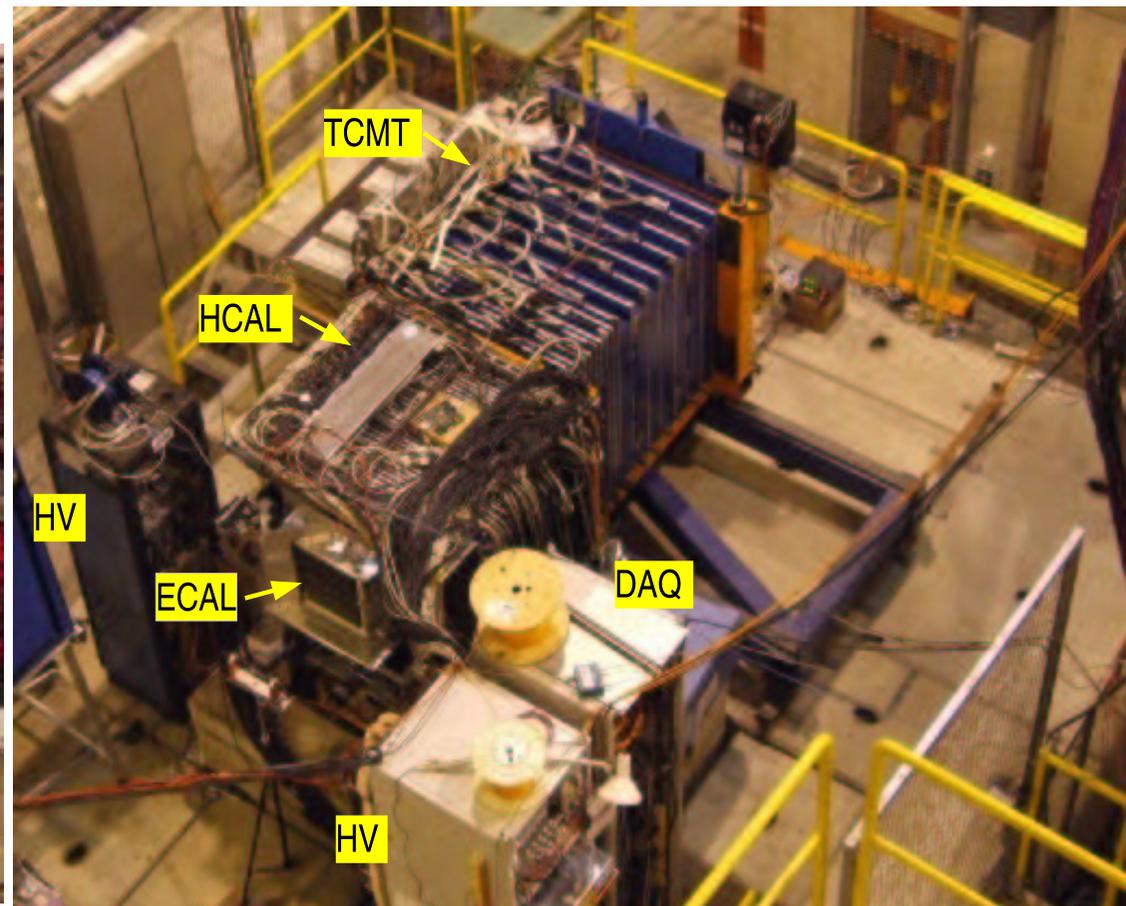


(top view)

# Transverse granularity


**ECAL  $18 \times 18 \text{ cm}^2$**

Si cells of  $1 \times 1 \text{ cm}^2$   
(216 cells per layer)

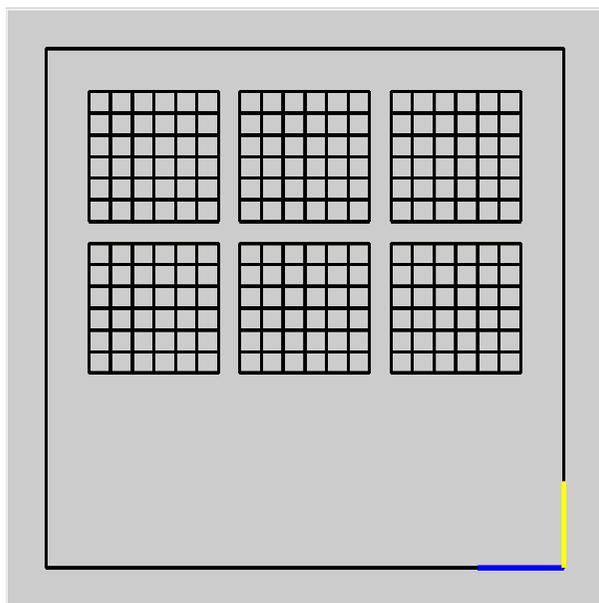


**HCAL  $100 \times 100 \text{ cm}^2$**

scint.tiles of  $3 \times 3$ ,  $6 \times 6$ ,  $12 \times 12 \text{ cm}^2$   
(216 tiles per layer)

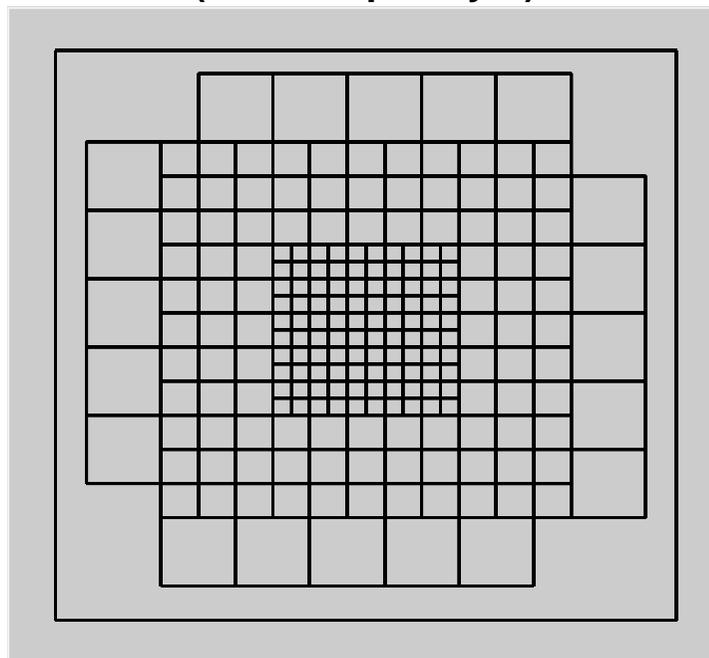

**TCMT  $100 \times 100 \text{ cm}^2$**

scint.strips X or Y of  $5 \times 100 \text{ cm}^2$   
(20 strips per layer)

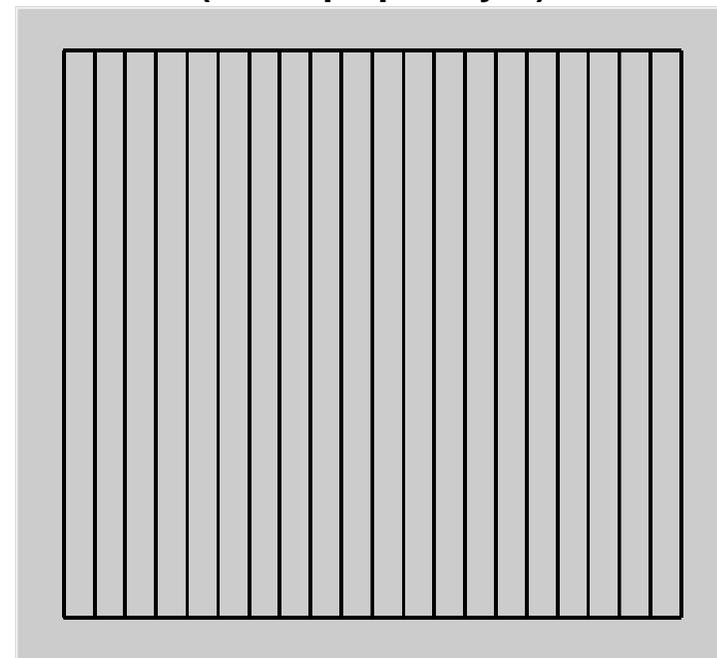

**Tail Catcher - Muon Tracker  
(see talk by K.Francis)**

---

# HCAL testbeam at CERN, Aug 2006

- ▶ **Particle ID**

  - : Cherenkov counter, 1 bit signal

- ▶ **Tracker**

  - : 3 XY chambers

- ▶ **Calorimeters**

  - : ECAL: 30 layers, 6480 channels

  - : HCAL: 15 modules, 3240 channels

  - : TCMT: 8 modules, 160 channels

# HCAL testbeam at CERN, Aug 2006

- ▶ • **HCAL alone, no ECAL in front**

- : electron beam, energy scan (6, 10, 15, 20, 30, 40, 45 GeV)

- : pion beam, energy scan (6, 10, 15, 20, 30, 40, 50, 60, 80 GeV)

- ▶ • **ECAL+HCAL**



- : pion beam, energy scan (30, 40, 50, 60, 80 GeV)

- ▶ • **ECAL**

- : electron beam, energy scan (10, 15, 20, 30, 40, 45 GeV)  
angle scan ( $0^\circ$ ,  $30^\circ$ ,  $45^\circ$ )


- ▶ • **samples of 500-600k events collected**

# HCAL $e/\pi$ ratio

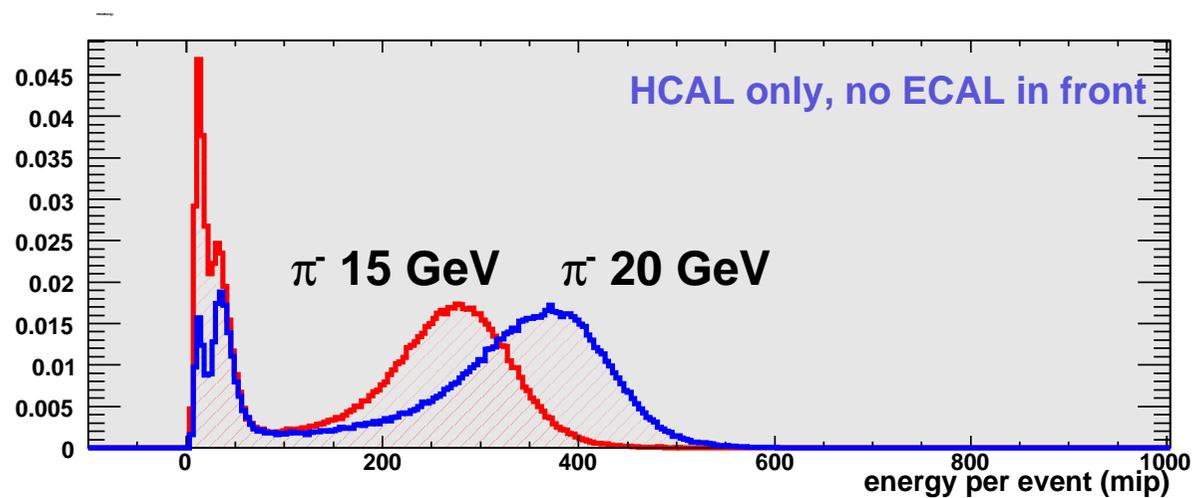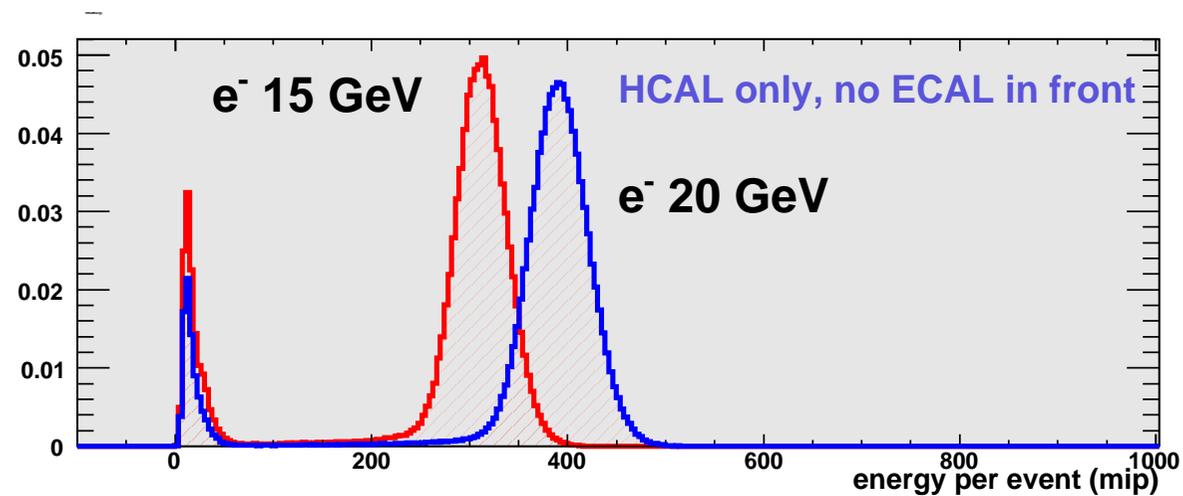

(raw data, no cleaning, no event selection)



# HCAL response with/without ECAL in front

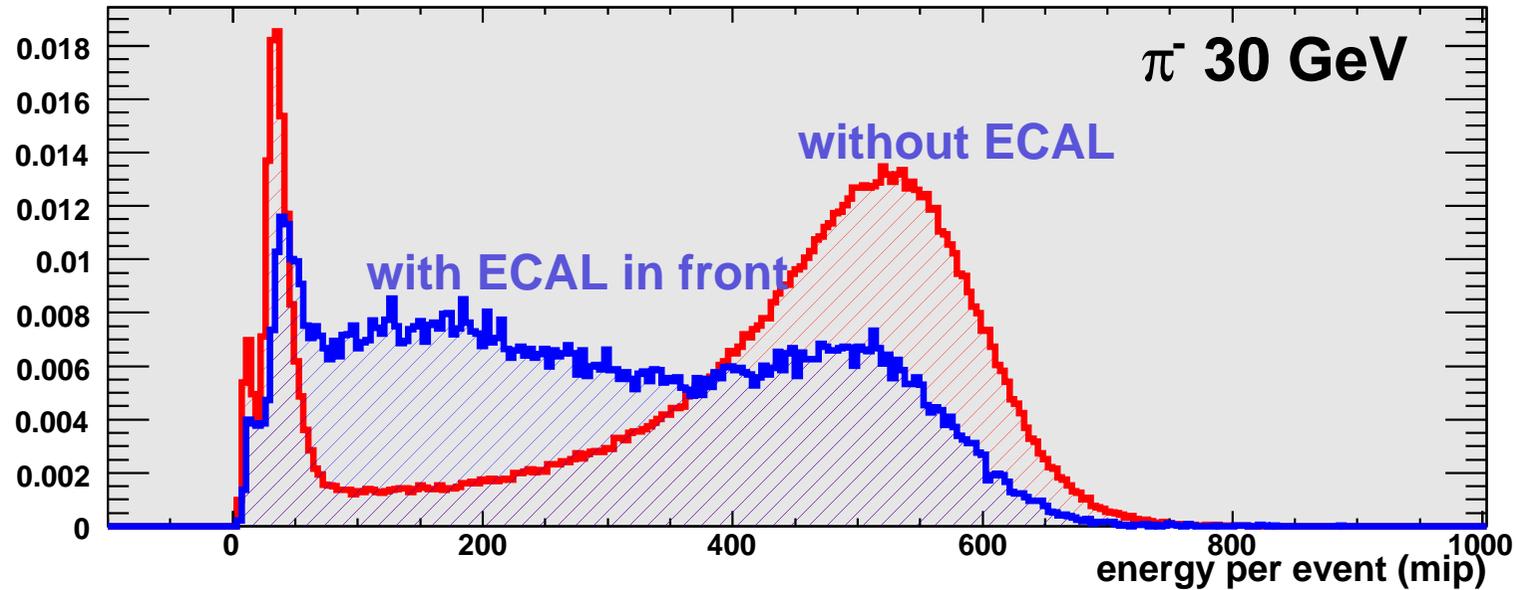

(raw data, no cleaning, no event selection)



# Shower longitudinal profile

## ECAL

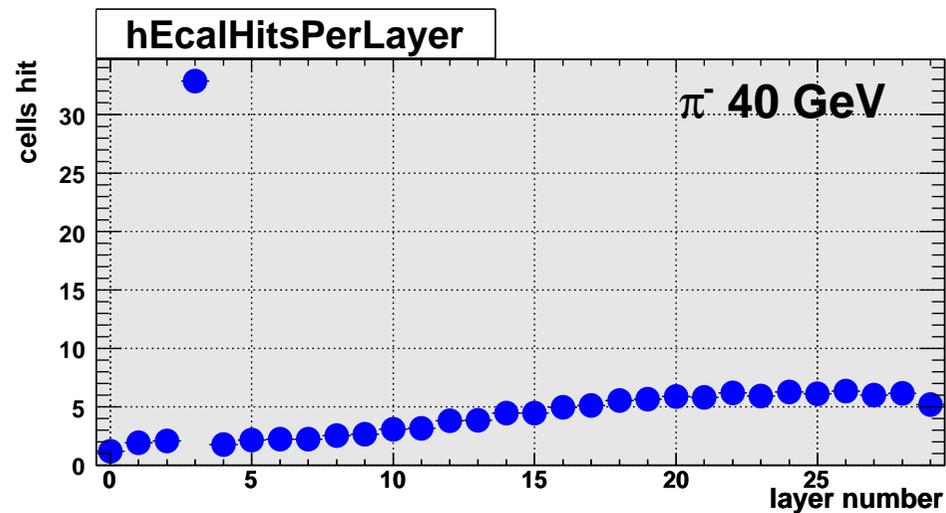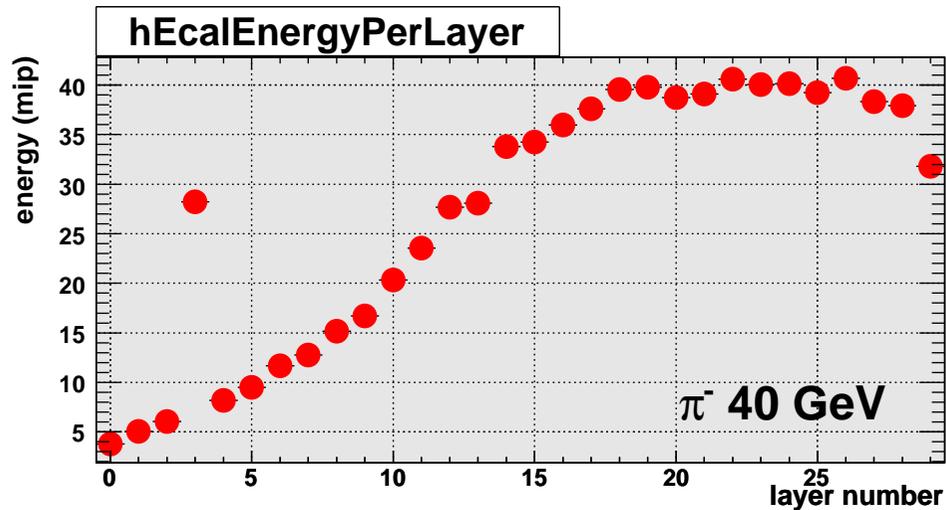

▷ some layers with high noise



## HCAL

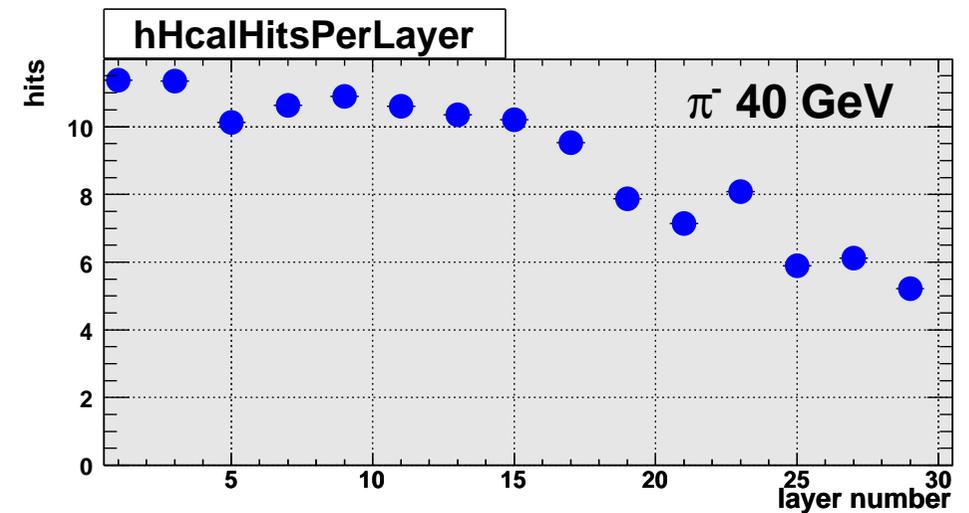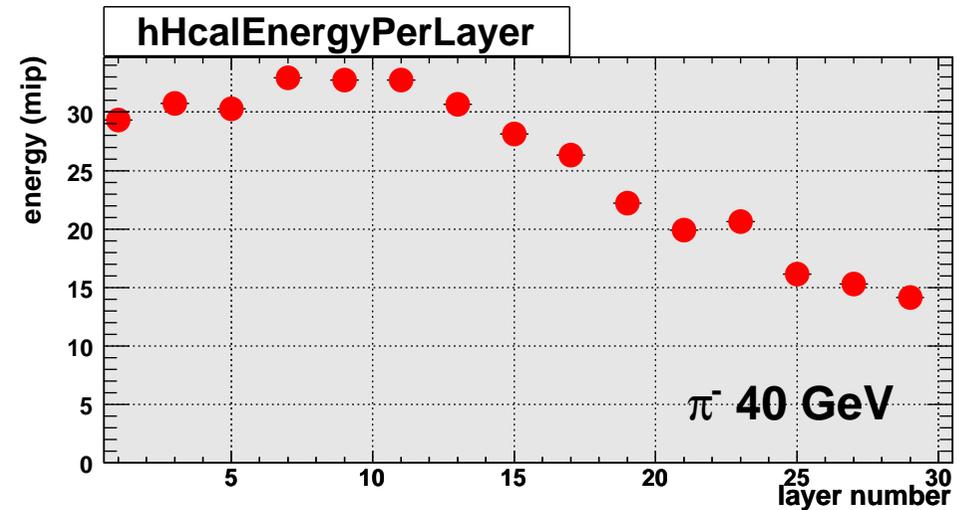

▷ only odd layers equipped and readout

(raw data, no cleaning, no event selection)

# ECAL vs HCAL response

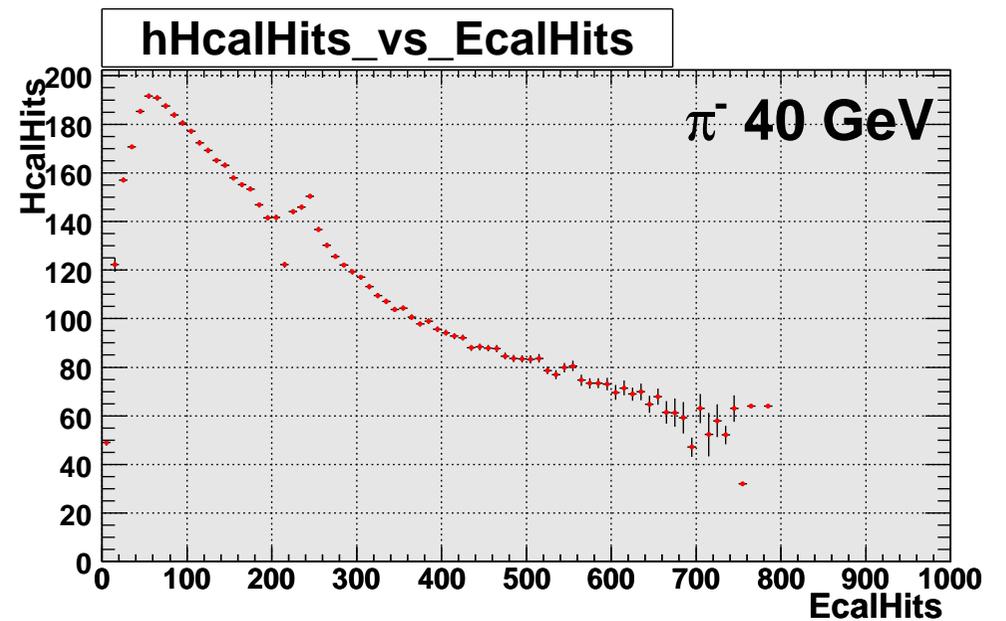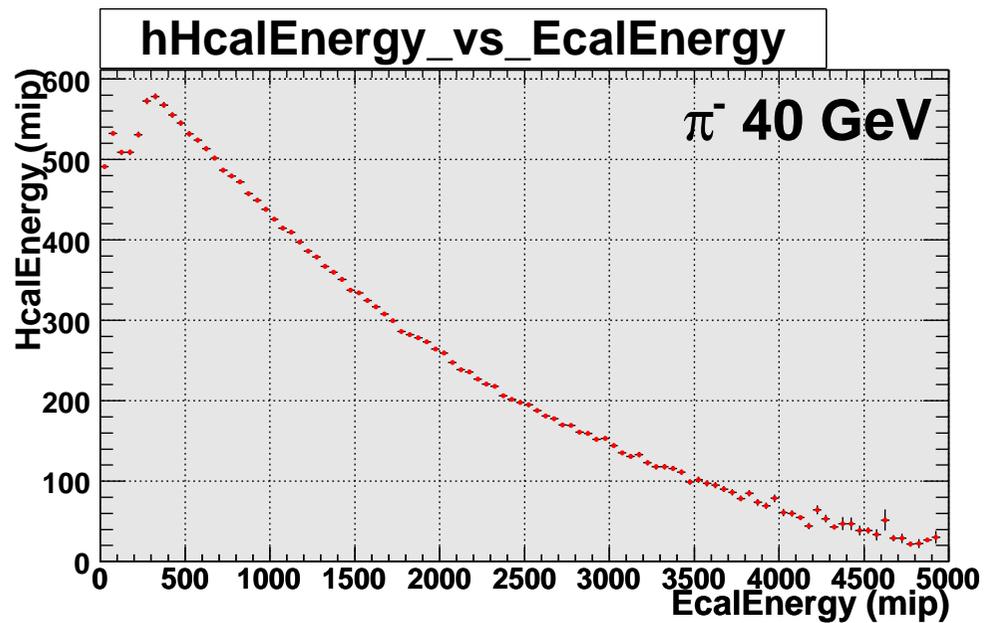

▷ as expected strong anti-correlation observed

(raw data, no cleaning, no event selection)

---

# Combined testbeam at CERN, Oct 2006

- ▶ **Particle ID**

- : Cherenkov counter, 1 bit signal

- ▶ **Tracker**

- : 3 XY chambers

- ▶ **Calorimeters**

- : **ECAL: 30 layers, 6480 channels**

- : **HCAL: 23 modules, 4968 channels**

- : **TCMT: completed, 16 modules, 320 channels**

# Combined testbeam at CERN, Oct 2006

## ▶ . **ECAL+HCAL+TCMT**

: pion beam, energy scan (6, 10, 15, 20, 30, 40, 50, 80 GeV)  
samples of 500k events

## ▶ . **ECAL**

: positron beam, energy scan (10, 16, 15, 18, 20, 30, 50 GeV)  
samples of 300k events

## ▶ . **HCAL alone, no ECAL in front**

: positron beam, energy scan (10, 15, 20, 30, 50 GeV)  
samples of 600k events

## ▶ . **parasitic run**

: 25M muon events collected

# CALICE testbeam at CERN

Run 300545:0 Event 5160

Time: 13:34:59:832:023 Sat Oct 14 2006

ECAL Hits: 32 Energy: 40.0841 mips

HCAL Hits: 223 Energy: 868.462 mips

TCMT Hits: 14 Energy: 32.7715 mips


mips

$\pi^-$  30 GeV

ECAL threshold = 0.5 mip

HCAL threshold = 0.5 mip


TCMT threshold = 0.7 mip

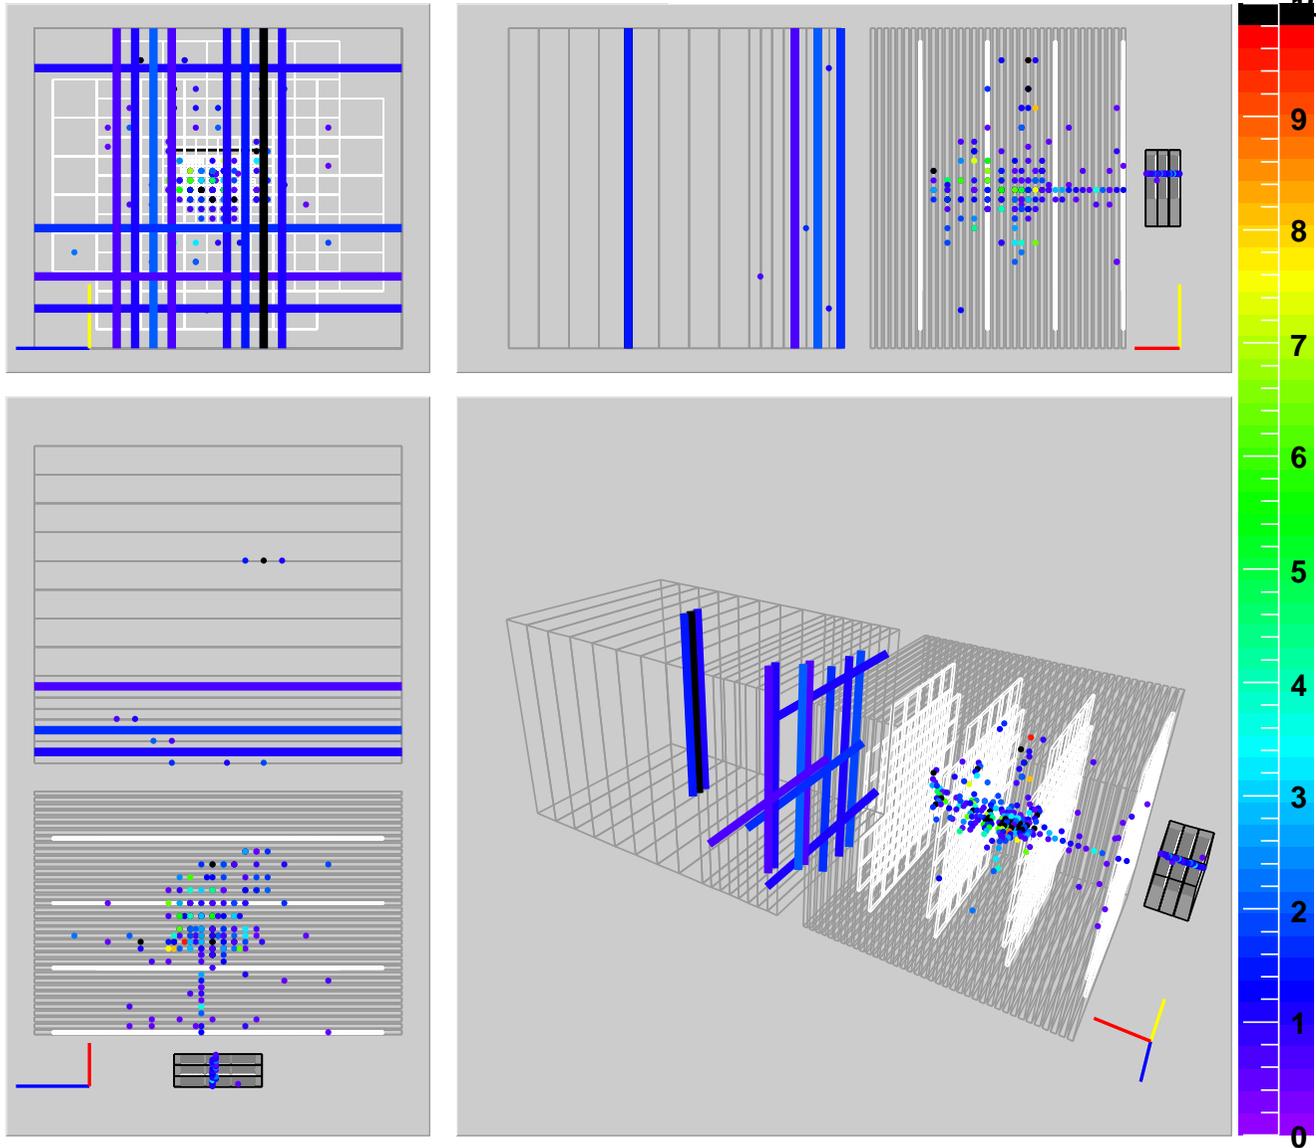

# CALICE testbeam at CERN

Run 300545:0 Event 5160


Time: 13:34:59:832:023 Sat Oct 14 2006  
Hits: 14 Energy: 32.7715 mips

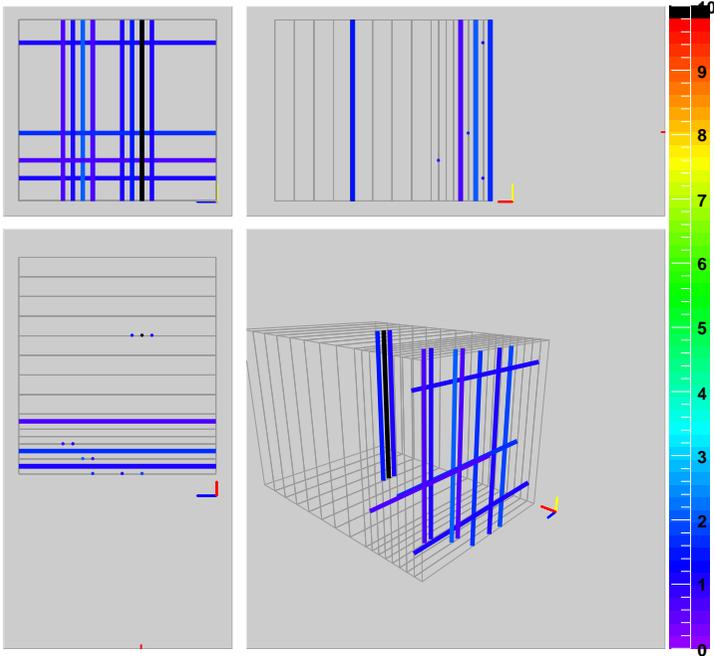

**TCMT**

Run 300545:0 Event 5160


Time: 13:34:59:832:023 Sat Oct 14 2006  
Hits: 223 Energy: 868.462 mips

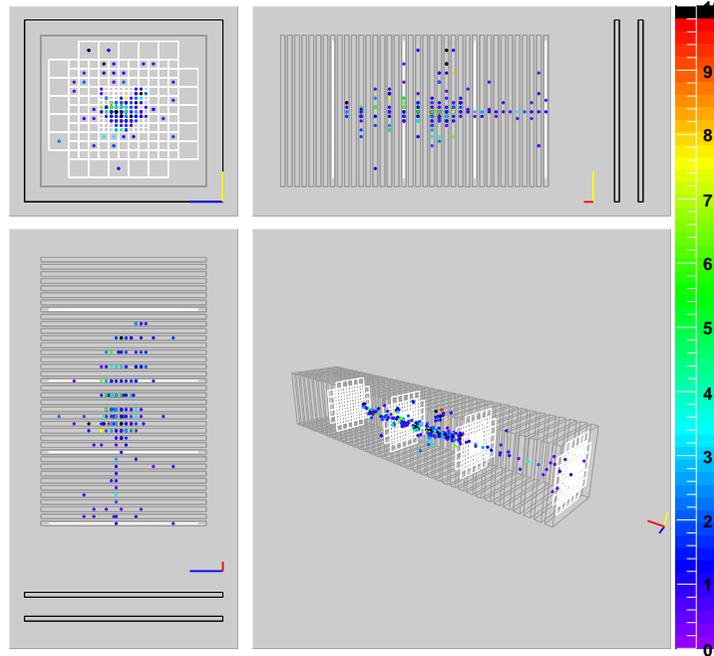

**HCAL**

Run 300545:0 Event 5160



Time: 13:34:59:832:023 Sat Oct 14 2006  
Hits: 32 Energy: 40.0841 mips

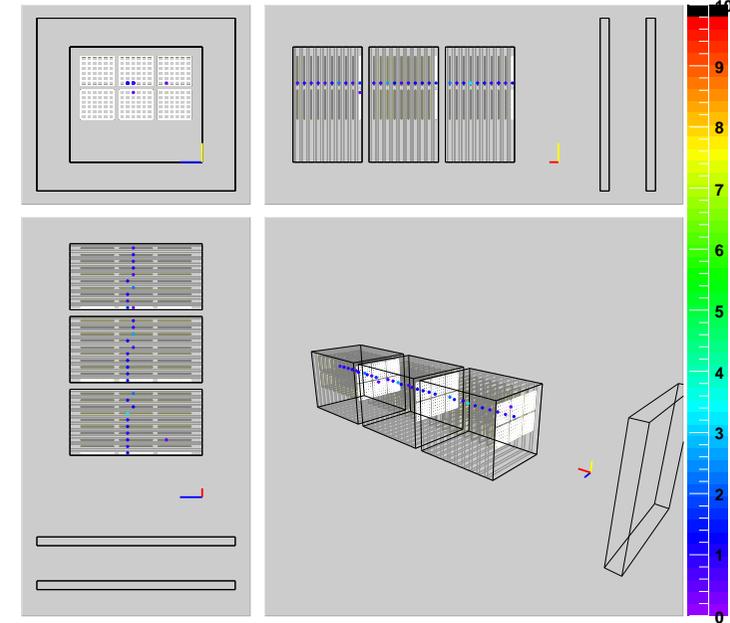



**ECAL**

# Shower longitudinal profile



## ECAL

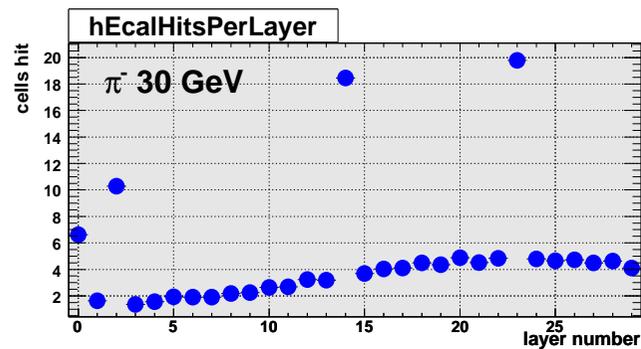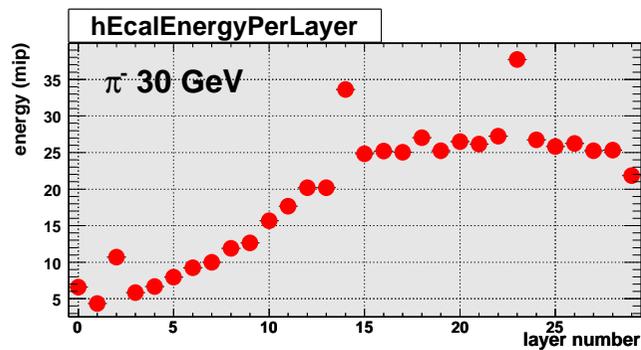

## HCAL



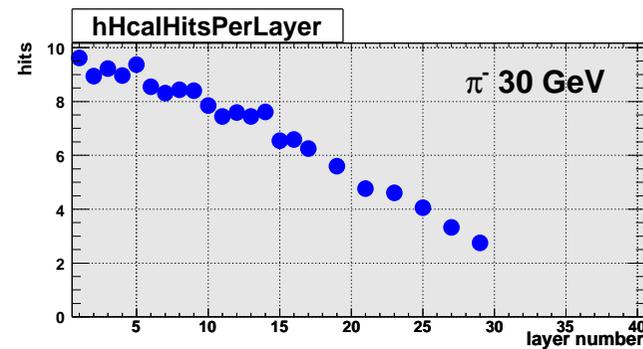
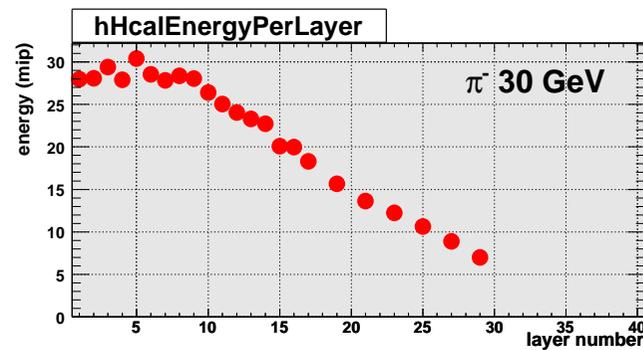


## TCMT

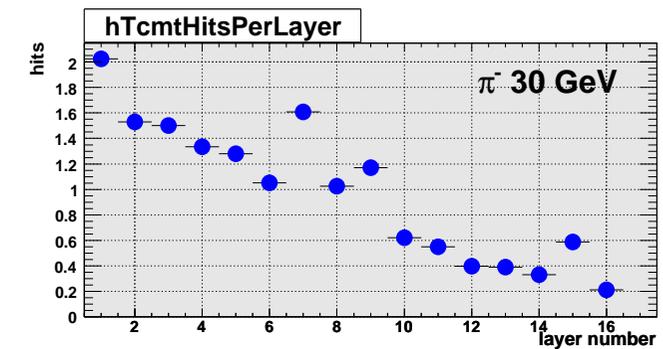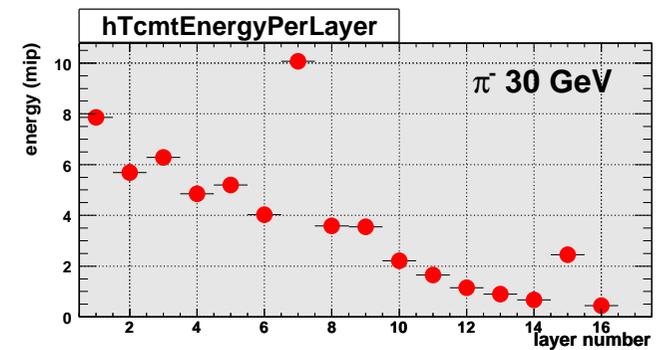


(raw data, no cleaning, no event selection)

# ECAL vs HCAL vs TCMT response

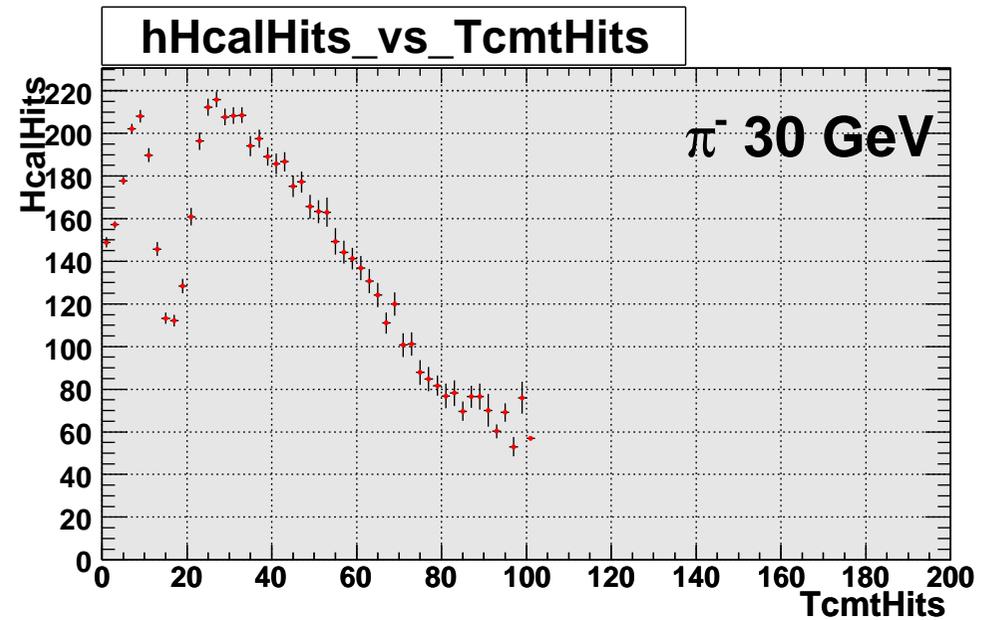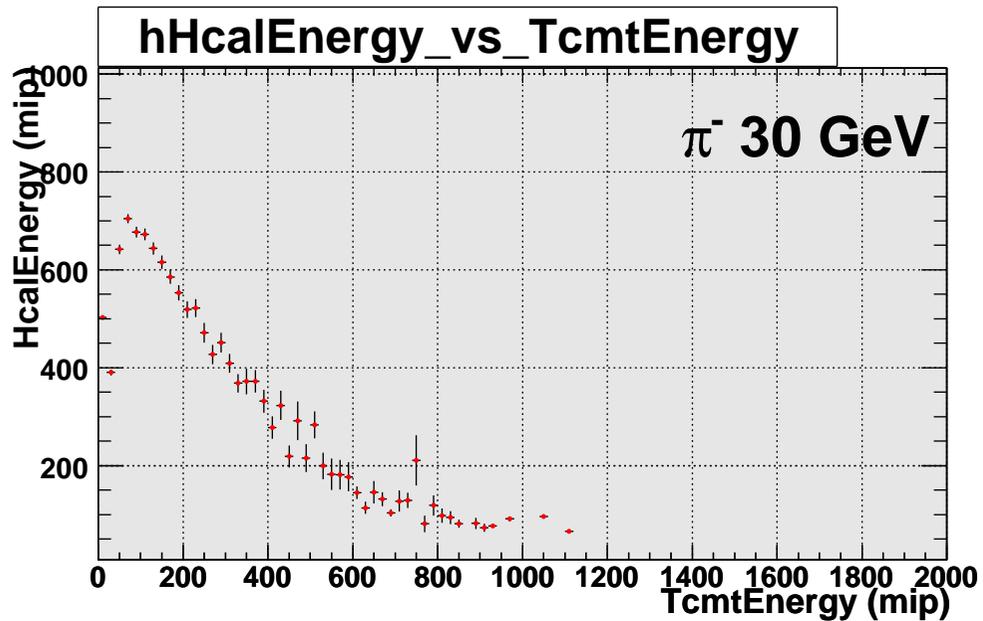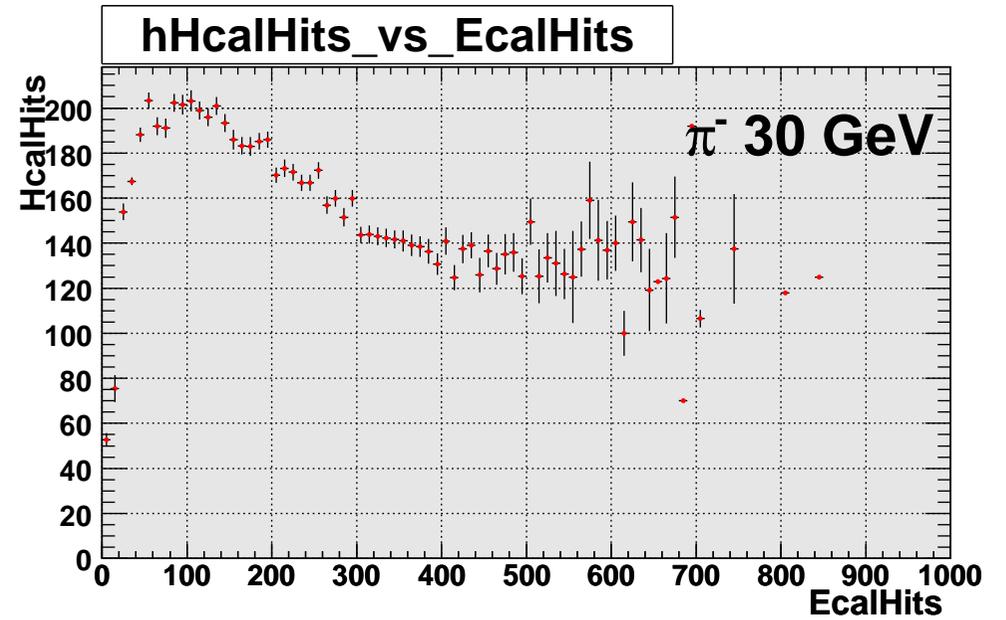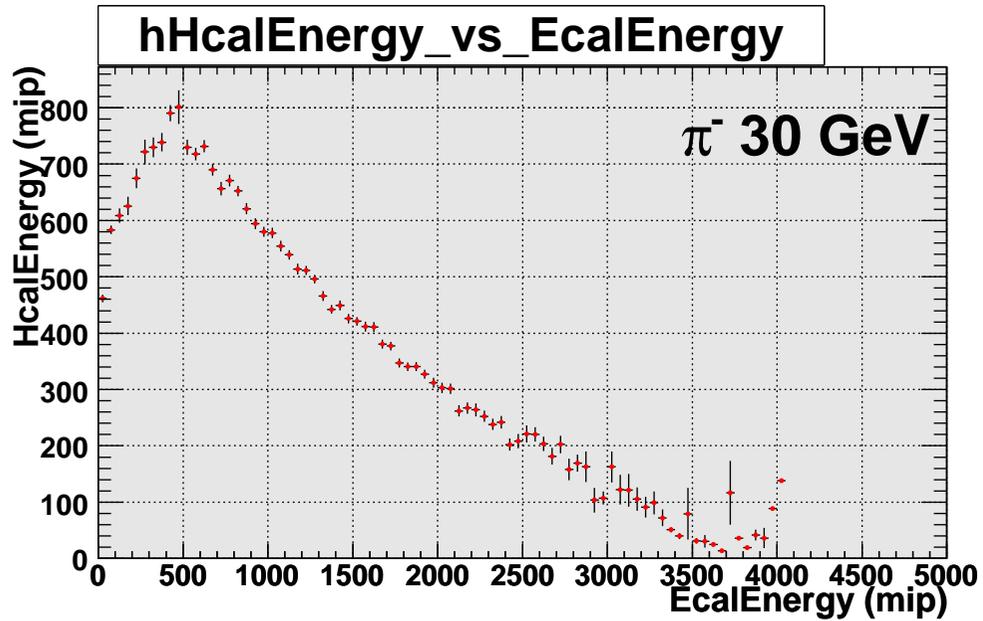

(raw data, no cleaning, no event selection)


# ECAL response to positrons

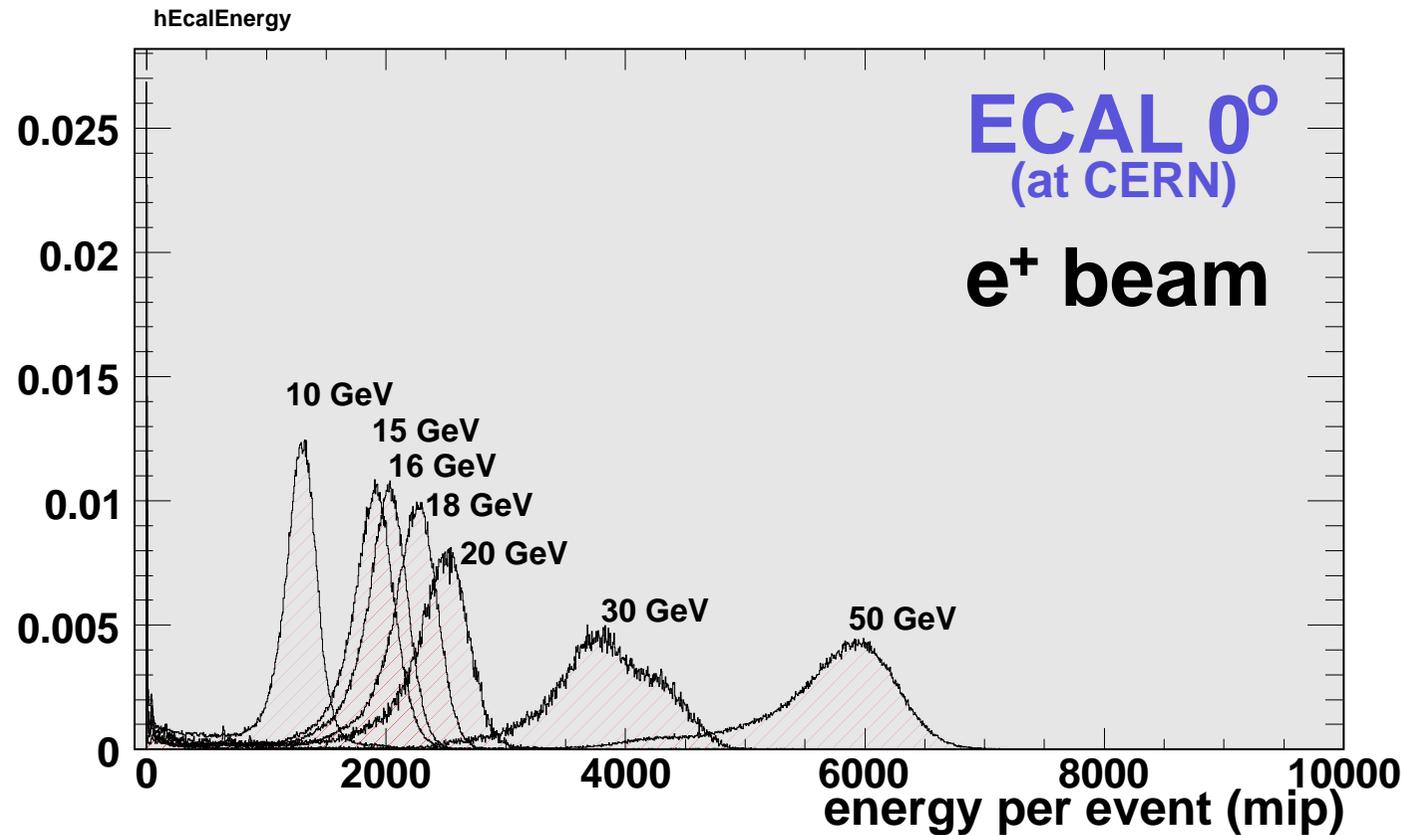

- ▷ most runs with nice and typical behaviour
- ▷ at 30 GeV run response affected by noisy/unstable layers

(raw data, no cleaning, no event selection)


# HCAL response to positrons

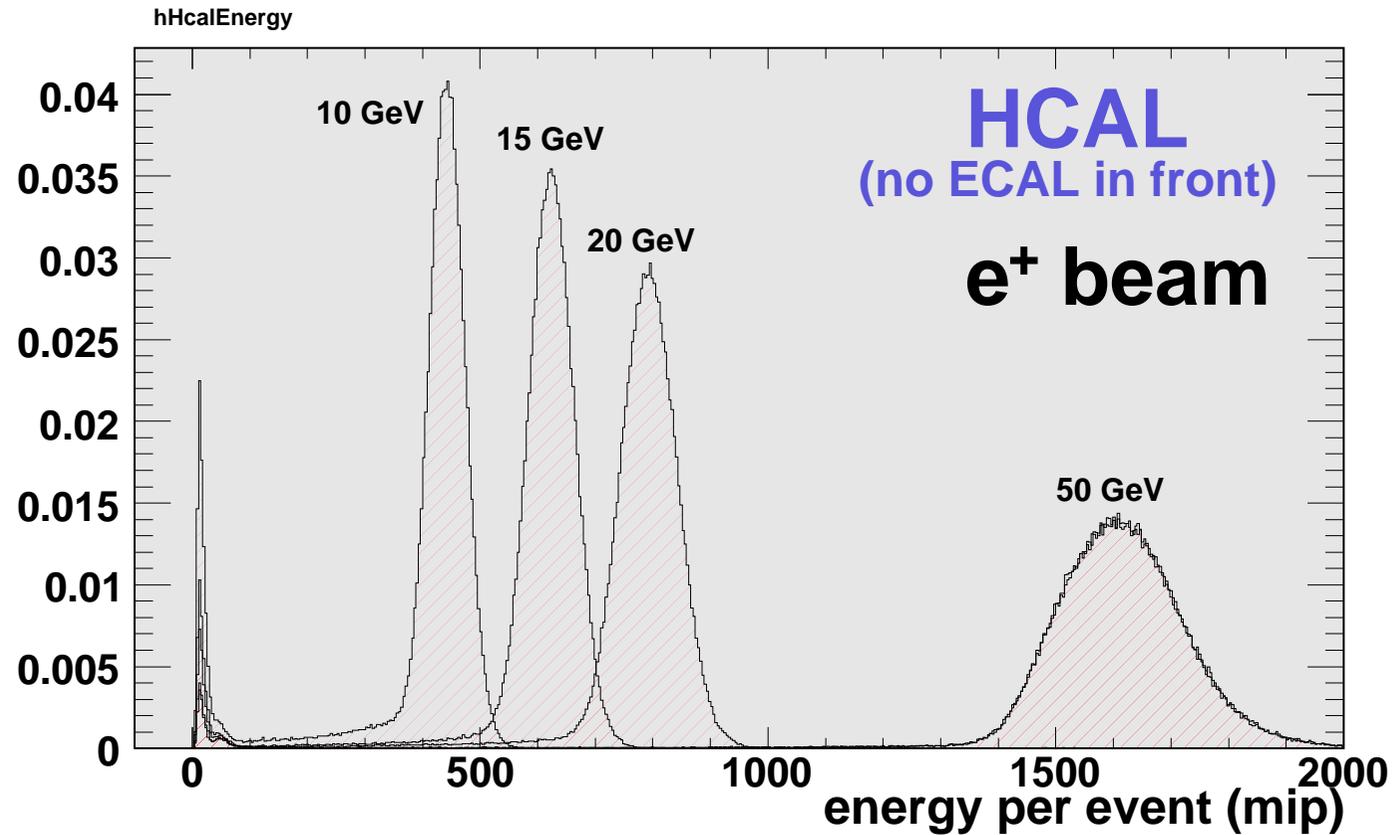

- ▷ runs for  $e/\pi$  studies
  - ▷ also very useful for SiPM saturation studies
- (raw data, no cleaning, no event selection)

# Testbeam Program at CERN 2006

- total data taking time:  $\sim 25$  days
- people on shift: 56
- beam duty cycle:  $\sim 60\%$
- detector up time  $> 90\%$
- **DAQ showed excellent performance, stable operation and continuous running without failures**  
**120 Hz max average rate ,**  
**about 500 Hz peak rate in spill**

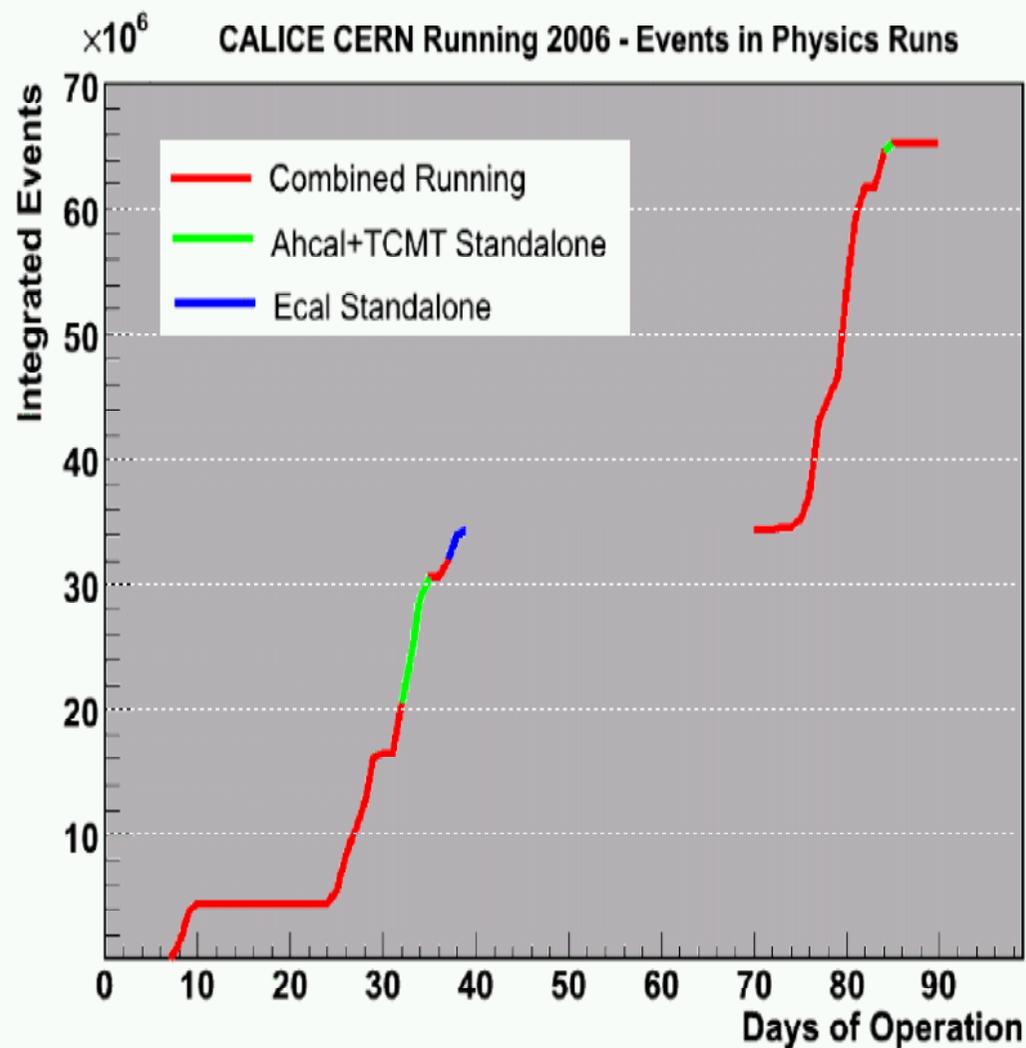

(see talk by R.Poeschl)

# CALICE Testbeam Plans for 2007-8

## ▶ Si ECAL + scint HCAL/TCMT

- : complete ECAL(transversally), complete HCAL(longitudinally), mount HCAL on movable/rotatable stage
- : 2nd round of combined testbeam at CERN (summer 2007)
- : **move to FNAL-MTBF in fall 2007**

### todo list

- data collection with complete instrumentation
- scans with incidence angle variation
- increase statistics at low energies (around 10 GeV)
- extension of the energy range towards smaller energies (down to  $\sim 2$  GeV)
- proton/antiproton data collection
- direct comparison with gaseous HCALs under identical beam conditions
- ... ..

# CALICE Testbeam Plans for 2007-8

## ▶ . **scint ECAL**

: testbeam at DESY with small prototype in early 2007

: testbeam at FNAL-MTBF with prototype completed, late 2007

## ▶ . **digital HCAL with RPCs, GEMs**

: "slice" test at FNAL-MTBF, early 2007

: start production of 1m<sup>3</sup> prototype, early 2008 (?)

: join combined testbeams at FNAL-MTBF, late 2008 (?)

## ▶ . **digital HCAL with $\mu$ Megas**

: build single chamber(s), first tests at CERN in 2007

: build/test 1m<sup>2</sup> chamber(s) in 2008

# Summary

## ▶ • an experiment at the ILC

- : strict requirements for vertex, tracking and calorimetric detectors
- : a lot of R&D effort needed (= money × time × bright manpower × facilities)

## ▶ • CALICE Collaboration

- : to conduct the R&D for calorimetry
- : **the main goal**


highly granular EM and HADR calorimeters to allow very efficient pattern recognition for excellent shower separation and pid within jets to provide excellent jet reconstruction efficiency

- : concepts-prototype studies

- ▷ Si/W ECAL, scint ECAL, scint analogue HCAL, gaseous digital HCALs
- ▷ loop over simulation-testbeam-analysis chain started
- ▷ a lot to come, a lot to learn


# Prototyping cycle

## SIMULATION

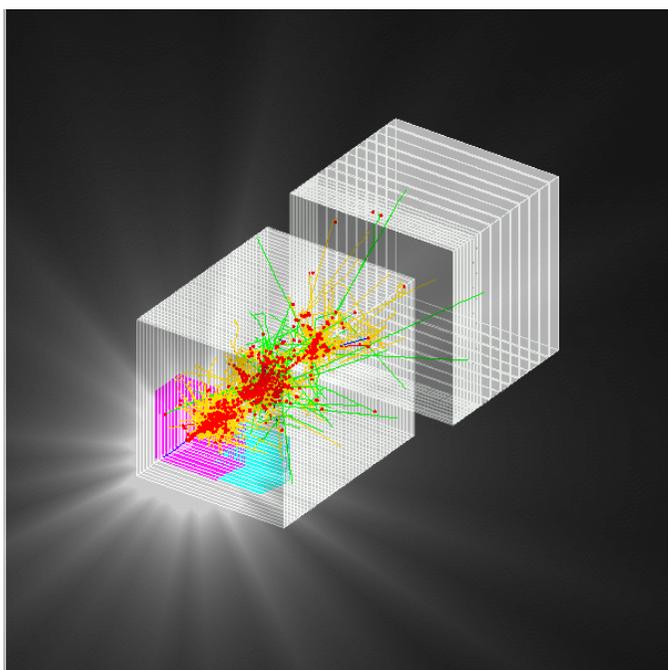


(slide by E.Garutti)

## REALITY

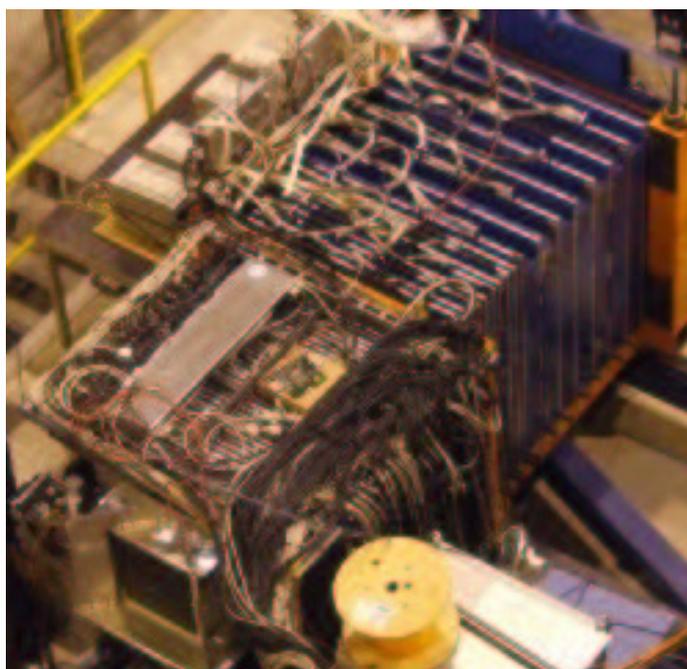

## DATA

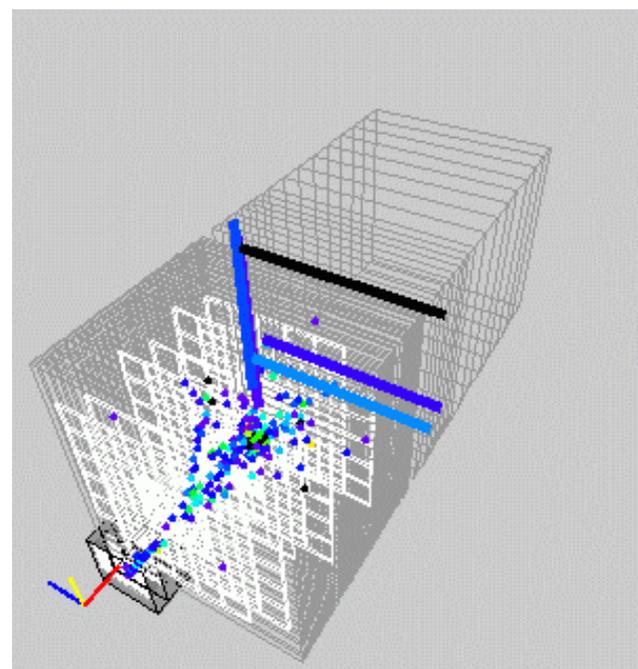


# Summary

- ▶ **CALICE Testbeam Program 2005-6**
  - : several rounds of technical and physics runs at DESY and CERN
  - : very busy and productive period, huge amount of data collected
  - : possible only with huge and constant effort of all involved
  
- ▶ **Plans for 2007-8**
  - : expect to continue effort at the same pace
  - : several rounds of testbeams at DESY, CERN, FNAL planned for development studies, technical runs and physics data collection
  - : **we wish/plan/need to move the "center-of-gravity" of our program to FNAL-MTBF**

# CALICE Testbeam at CERN Oct2006

## TOP – CERN October 2006

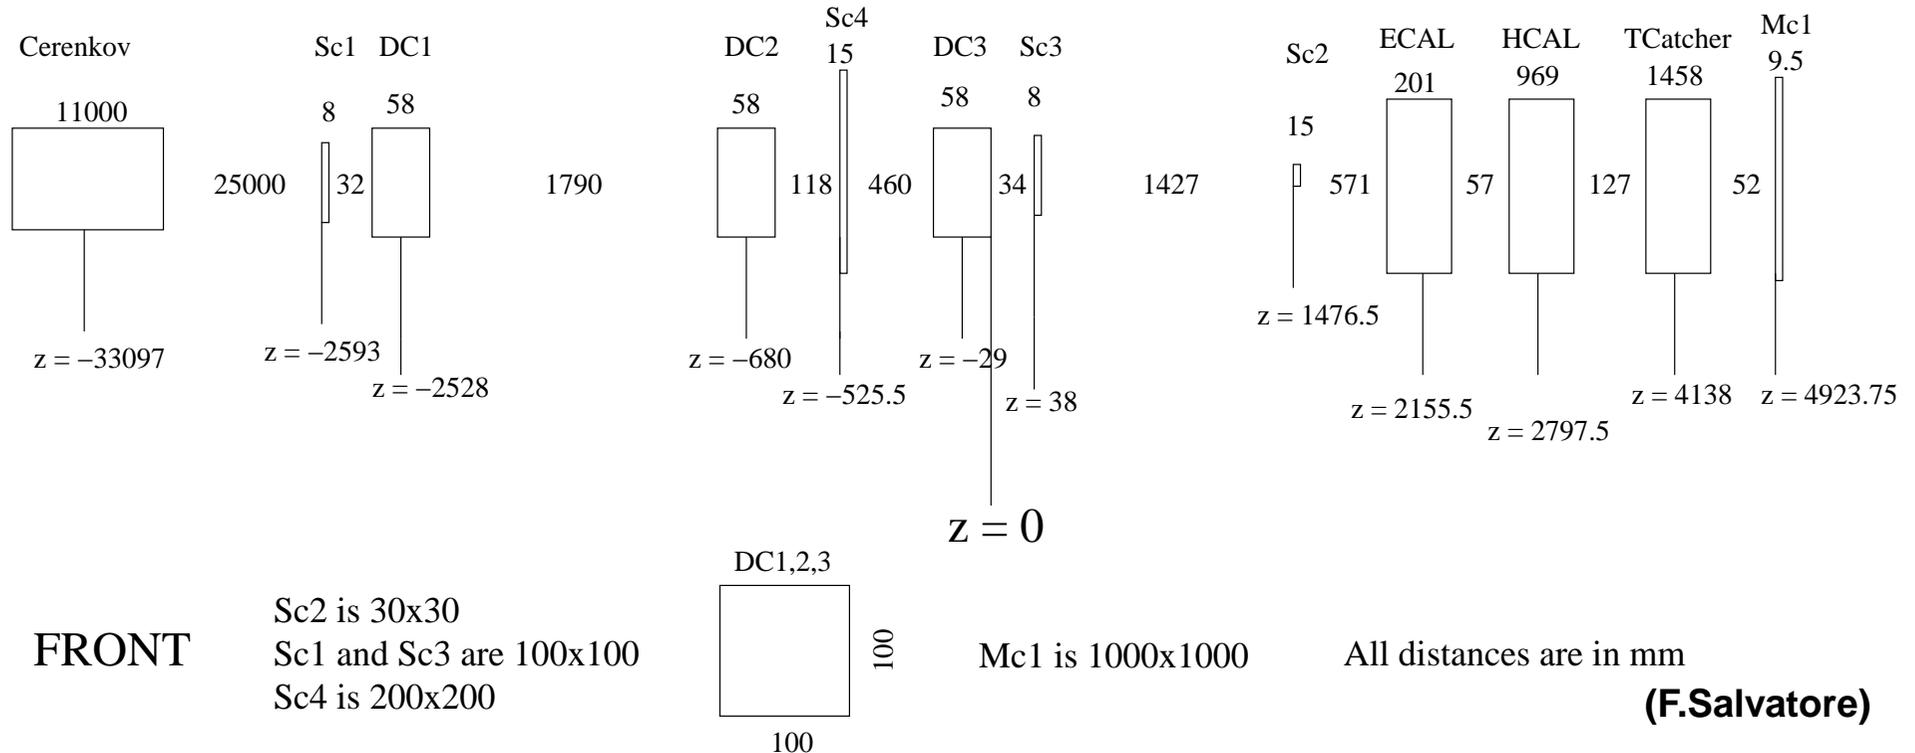

**Cherenkov counter:** 11m He with adjustable pressure, provides electron/pion separation below 40 GeV

**Drift chambers:** double wire, 300  $\mu m$  resolution

**Scint.pads:** fast trigger signal generation < 30 ns, also veto counter to cut double beam particles

**Constraints:** DAQ rate = 120Hz , trigger timing < 150 ns

**Beam characteristics:**  $\sim$  3 cm broad profile, Gaussian shape, purity: 50% muons at low energy in pions or electrons, beam momentum resolution < 0.5%