

# Neutrino Factory R&D \*

K.Long <sup>a</sup>

<sup>a</sup> High Energy Physics Group, Department of Physics, Imperial College London, Exhibition Road, London SW7 2BZ.

Elegant experiments are being carried out, or are in preparation, to improve the precision with which the solar and atmospheric neutrino-oscillation parameters are known, and to attempt to make a first measurement of the small mixing angle  $\theta_{13}$ . The compelling case for the development of an accelerator-based neutrino source to serve the programme of precision measurements of neutrino oscillations and sensitive searches for leptonic-CP violation that is required to follow these experiments is briefly reviewed. The Neutrino Factory, an intense high-energy neutrino source based on a stored muon beam, is widely believed to yield a precision and sensitivity superior to other proposed second-generation facilities. The alternatives are identified and the case for a critical comparison of the performance of the various options is presented. Highlights of the exciting international R&D programmes which are designed to demonstrate the feasibility of the required techniques are then reviewed. The steps that the international community is taking to produce, by the end of the decade, a full conceptual design for the facility are described. The ambition of the Neutrino Factory community is to demonstrate the feasibility of a cost-effective design such that, should forthcoming measurements show that it is required, the facility could be brought into operation in the second half of the next decade.

## 1. Introduction

Beams of high-energy electron- and muon-neutrinos will be produced from intense stored muon beams at the Neutrino Factory [1]. A schematic diagram of the main sub-systems of the accelerator facility is shown in figure 1. The process of generating the stored muon beam starts with the bombardment of a suitable target with a high-power pulsed proton beam of moderate energy ( $\sim 5-15$  GeV). Pions and kaons produced in the target are captured and allowed to decay to produce muons; the muons must be accelerated rapidly to  $\sim 20-50$  GeV before being injected into the storage ring. The muon beam initially occupies a very large phase space, making it necessary to develop fast, affordable, large-aperture acceleration systems and/or a phase-space reduction (cooling) technique that is rapid when compared to the muon lifetime. The feasibility of such

a Neutrino Factory has been addressed in a number of studies [2–6]. These studies defined the programme of R&D required to establish technological solutions for each of the key accelerator systems. The main purpose of this contribution to the proceedings of the High Intensity Frontier Workshop is to review the status of these R&D programmes (section 3).

In making the case that the Neutrino Factory is the tool of choice for the era of precision measurements of neutrino oscillations and high-sensitivity searches for leptonic-CP violation, it is necessary to review the Neutrino Factory physics reach in the context of the present generation of experiments and the performance of other proposed second-generation neutrino facilities (such as second-generation super-conventional beams [7,8] or beta-beams [9]). Furthermore, the importance of the study of the neutrino is such that it is essential to bring into operation the best possible second-generation programme at around the time the present-generation experiments are

---

\*Talk presented at the High Intensity Frontier Workshop, La Biodola, Isola d'Elba, Italy, 28<sup>th</sup> May – 1<sup>st</sup> June 2005.

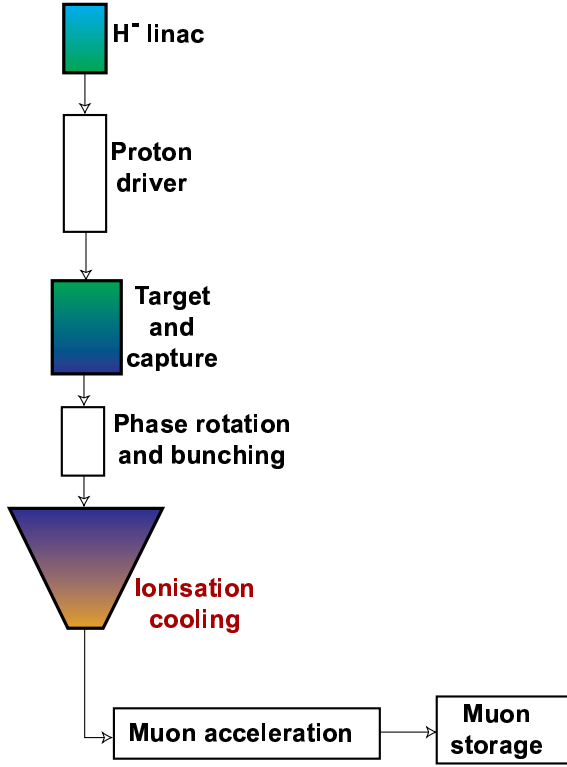


Figure 1. Schematic drawing showing the major sub-systems in the Neutrino Factory accelerator complex.

being completed. The experimental programme planned for the next five years is discussed in section 2 and used to identify the timescale on which it would be desirable to make the case for the Neutrino Factory.

## 2. Motivation

### 2.1. Phenomenology of neutrino oscillations

The phenomenon of neutrino oscillations is readily described by extending the Standard Model (SM) to include three neutrino mass eigenstates;  $\nu_1$ ,  $\nu_2$ , and  $\nu_3$  with masses  $m_1$ ,  $m_2$  and  $m_3$  respectively [10]. The flavour eigenstates,  $\nu_e$ ,  $\nu_\mu$ , and  $\nu_\tau$ , are obtained by rotating the mass eigen-

states using the unitary matrix  $U$  which may be written:

$$U = U_{23}U_{13}U_{12} \quad (1)$$

where

$$U_{23} = \begin{pmatrix} 1 & 0 & 0 \\ 0 & c_{23} & s_{23} \\ 0 & -s_{23} & c_{23} \end{pmatrix}, \quad (2)$$

$$U_{13} = \begin{pmatrix} c_{13} & 0 & s_{13}e^{i\delta} \\ 0 & 1 & 0 \\ -s_{13}e^{-i\delta} & 0 & c_{13} \end{pmatrix}, \quad (3)$$

$$U_{12} = \begin{pmatrix} c_{12} & s_{12} & 0 \\ -s_{12} & c_{12} & 0 \\ 0 & 0 & 1 \end{pmatrix}, \quad (4)$$

the cosines and sines of the three mixing angles  $\theta_{12}$ ,  $\theta_{13}$ , and  $\theta_{23}$  are denoted  $c_{12}$  etc., and  $\delta$  is a phase parameter. Measurements of neutrino-oscillation probabilities can not be used to determine the absolute neutrino-mass scale but, since the probabilities depend on the mass-squared differences,  $\Delta m_{23}^2 = m_3^2 - m_2^2$  and  $\Delta m_{12}^2 = m_2^2 - m_1^2$ , neutrino oscillations can be used to determine the mass hierarchy. Electron neutrinos produced in the sun undergo elastic scattering with electrons in the material of the sun. This, the MSW effect [10], modifies the effective mass that appears in the electron-neutrino oscillation probability and has been used to determine the sign of  $\Delta m_{12}^2$ . The sign of  $\Delta m_{23}^2$  can be determined in oscillation experiments for which the baseline is sufficiently long ( $\gtrsim 1000$  km) and for which the neutrino energy is sufficiently high ( $E_\nu \gtrsim 10$  GeV).

Leptonic-CP violation will occur if  $\delta \neq 0$  (and  $\sin \theta_{13} \neq 0$ ). Measurements of the difference between the oscillation probabilities for neutrinos and anti-neutrinos can be used to determine  $\delta$ . Such measurements require large data sets and appropriately chosen baselines and neutrino energies. To obtain the required neutrino-interaction rate requires either a very large detector or a very intense source (or both).

The challenge to the neutrino community is to measure all the mixing angles of the MNS matrix as precisely as possible, to determine the sign of  $\Delta m_{23}^2$  and to measure precisely  $\Delta m_{12}^2$  and  $\Delta m_{23}^2$ , and, by measuring  $\delta$ , to discover leptonic-

CP violation if it occurs. The fundamental importance of the search for leptonic-CP violation is self-evident. Precision measurements of the parameters that govern neutrino oscillations are essential if a complete understanding of the nature of the neutrino is to be obtained. Such measurements will either establish the minimal model outlined above or, by establishing parameter sets inconsistent with it, point to the existence of entirely new phenomena; for example, the three-generation scenario would have to be abandoned should MiniBOONE [11] confirm the presently unexplained LSND result [12–15]. The second-generation neutrino source must, therefore, be capable of doing both.

## 2.2. Context and timescales

Data from the Sudbury Neutrino Observatory (SNO) [16,17] and KamLAND [18,19] experiments, together with data from Super-Kamiokande [20] and elsewhere have been used to determine  $\theta_{12}$  with a precision of around 10% and  $\Delta m_{12}^2$  with a precision of 10% – 20%. The parameters  $\sin^2 \theta_{23}$  and  $\Delta m_{23}^2$  have been determined using atmospheric neutrino data from Super-Kamiokande [21] and verified using an accelerator-based neutrino source by the K2K experiment [22]. With five to seven years of running, the MINOS long-baseline experiment [23, 24], which has begun to take data, will determine  $\theta_{23}$  and  $\Delta m_{23}^2$  with a precision of around 10%. The two CNGS experiments OPERA [25] and ICARUS [26,27], which are designed to observe  $\nu_\tau$  appearance and are scheduled to start data taking in 2008, will verify aspects of the mixing formalism outlined above. Two first-generation super-beam experiments, T2K in Japan [28,29] and NO $\nu$ A in the US [30], are being mounted with the objective of demonstrating that  $\sin^2 2\theta_{13}$  is greater than zero. The T2K experiment will start in 2009 and, after five years of data taking, will be sensitive to  $\sin^2 2\theta_{13}$  down to about 0.005 at 90% C.L. NO $\nu$ A, which has recently been granted scientific approval by the FNAL PAC, will yield a comparable sensitivity. Both T2K and NO $\nu$ A will improve the determination of  $\theta_{23}$  and  $\Delta m_{23}^2$  to the level of a few percent after five years of data taking. However, neither T2K (Phase I) nor

NO $\nu$ A will have the sensitivity required to discover leptonic-CP violation or to deliver the precision measurements of the parameters that are required for a full understanding of neutrino oscillations.

To take the study of neutrino oscillations further requires a second-generation facility ready to begin operation in the second half of the next decade. This facility must be capable of making high-precision measurements of the mixing angles and mass-squared differences and of making searches for leptonic-CP violation of great sensitivity. The precision of the measurements must be such that sensitive tests of the consistency of the theoretical framework can be made. Three types of facility have been proposed to provide the neutrino beams required to serve this second-generation programme. The Neutrino Factory gives the best performance over almost all of the parameter space and is believed to be the ‘facility of choice’. Second-generation super-conventional-beam experiments may be an attractive option in certain scenarios. A beta-beam, in which electron neutrinos (or anti-neutrinos) are produced from the decay of stored radioactive-ion beams, in combination with a second-generation super-beam, may be competitive with the Neutrino Factory [31].

Following the feasibility studies that were carried out at the turn of the century, an international programme of R&D into the accelerator complex has grown up, fostered in part by the ‘NuFact’ (Neutrino Factory, super-beam and beta-beam) workshop series which was initiated in 1999. The programme of hardware development, reviewed below, is now reaching maturity. To put in place the facility (or facilities) required to serve the second-generation programme of precision measurement requires that a conceptual design be prepared by the end of the decade together with as broad a consensus as possible on the roadmap for its implementation. A step on this road was taken at NuFact05 with the launch of a one-year international ‘scoping study’ of a future Neutrino Factory and super-beam facility [32]. The objectives of the scoping study are to [33]:

- Evaluate the physics case for a second-generation super-beam, a beta-beam facility and the Neutrino Factory and to present a critical comparison of their performance;
- Evaluate the various options for the accelerator complex with a view to defining a baseline set of parameters for the sub-systems that can be taken forward in a subsequent conceptual-design phase; and to
- Evaluate the options for the neutrino detection systems with a view to defining a baseline set of detection systems to be taken forward in a subsequent conceptual-design phase.

The conclusions of the scoping study will be presented at NuFact06 and published in a written report in September 2006.

### 3. Neutrino Factory R&D

It is not possible in a short article such as this to do justice to the Neutrino Factory R&D programmes that are being carried out in Europe, Japan and the US which, together, cover all aspects of the facility. The following paragraphs therefore emphasise the key elements of the programme.

#### 3.1. The proton-driver front-end

The Neutrino Factory proton driver is required to deliver 1 – 4 MW of proton-beam power at an energy of 5 – 15 GeV in  $\sim 1$  ns bunches. Machines of similar specification are required to drive a next generation spallation-neutron source, a radioactive heavy-ion facility, and to generate intense ‘super-conventional’ neutrino beams. Furthermore, high-power proton sources are required to serve applications such as the transmutation of nuclear waste. Such CW sources share many of the technological challenges presented by high-power pulsed proton beams.

The activation of the accelerator elements through the loss of a fraction of the primary beam power is the principal issue for the development of a high-power proton driver. To keep the activation within acceptable limits requires that the beam-loss rate should be no more than 1 W/m

[35]. To achieve this challenging specification requires that the beam quality at injection be exceptionally good. Several programmes aimed at developing the technologies required to produce such high quality beams are underway [36]. The programmes emphasise the front end of the accelerator, i.e. from the ion source up to energies of a few MeV. For pulsed proton beams, the development of high-quality beam choppers is of particular importance. ‘Choppers’ are designed to remove unwanted bunches from the beam with 100% efficiency and are required if low-loss injection into accumulator or compressor rings or clean on-off transitions are to be achieved.

Such parallel developments are a strength as they allow the sharing of expertise and information and give confidence that the front-end of the Neutrino Factory accelerator complex will be developed on an appropriate timescale.

#### 3.2. Target and capture

Efficient pion production may be achieved by bombarding a rod-like high- $Z$  material with the primary proton beam. For solid targets, fatigue caused by beam-induced thermal shock is the principal issue that must be addressed in the design of the target [37]. To reduce the effect of shock damage to solid targets may require that the target be replaced every beam pulse. Several solid-target schemes have been proposed [38]. A free-flowing liquid-mercury-jet target is a conceptually simple alternative [38]. Shock-induced processes cause the break-up of the jet, therefore the jet velocity must be chosen such that a new volume of liquid mercury is exposed to the beam every pulse.

Two schemes have been proposed by which the particles produced in the target may be captured. The first uses high-field solenoid magnets to capture both positive and negative particles at the same time [3]. The second calls for a magnetic horn to focus either positive or negative particles into the subsequent transport and decay sections [5]. The horn scheme has the advantage that the focussing element closest to the target itself is relatively simple. The advantage of the solenoid scheme is that an efficiency gain of a factor of two can be achieved if the downstream accelera-

tor complex is designed to manipulate and store  $\mu^+$  and  $\mu^-$  simultaneously [4]. In each case, significant engineering work needs to be carried out to ensure that the target station can be operated safely.

Particle production in the target has been studied [34]. Though particle-production models give significantly different rates and spectra, the results indicate that a proton driver with an energy in the range  $\sim 5 - 15$  GeV is likely to be suitable. In order to optimise the target and capture system, it will be important to bench-mark the various simulation codes against measured particle distributions. Two experiments, HARP [39] at CERN and MIPP [40] at FNAL have been (or are being) carried out to measure these distributions. The HARP experiment has recently presented results for forward-particle production [41]. The large-angle data, which is expected to be finalised soon, will be important in tuning the particle-production models.

### 3.2.1. Characterisation of materials

The development of the conceptual design for the Neutrino Factory target station rests on an understanding of the properties of the various proposed materials under extreme conditions. Irradiation studies of solid targets are being carried out at BNL and at CERN [38]. These studies include the investigation of the degree to which the bombarded material can be annealed by baking at high temperature. The intensity, repetition rate, and beam time available for these studies are insufficient to simulate target exposures comparable to long-term (several months to a year) use at the Neutrino Factory. The UK Neutrino Factory collaboration is therefore developing a technique in which a high-current pulse is used to generate, in a sample of tantalum wire, energy densities comparable to those expected in the Neutrino Factory target [42]. The current-pulse technique will be used to mount a ‘life-time’ test. The numerical techniques needed to extrapolate these measurements to the Neutrino Factory target using LS-DYNA [43] are being developed in parallel.

Measurements of the effect of intense proton-beam pulses on liquid mercury have been carried out at BNL, and studies of the development

of mercury jets both with and without magnetic field have been carried out at Grenoble and at BNL respectively [44]. For liquid-jet targets, the energy deposited by the beam can be sufficient to cause voids to be created in the body of the jet by the shock-induced transient pressure waves. This process, referred to as cavitation, is being studied experimentally at CERN using a high-power laser impinging on a jet of water [45]. Numerical studies of the passage of particle beams through mercury-jet targets have been developed and now give a good description of the measured behaviour [46].

### 3.2.2. The liquid-mercury-jet target

The liquid-metal option for a pion-production target capable of operating with a multi-MW pulsed proton beam at a Neutrino Factory will be tested in the MERIT experiment [47]. MERIT, which has recently been given scientific approval at CERN and will be carried out by an international collaboration, will expose a mercury jet of 1 cm diameter and flowing at 20 m/s in a 15 T solenoidal magnetic field to an intense proton beam from the CERN PS. MERIT is scheduled to begin to take data in 2007.

A schematic diagram of the experiment is shown in figure 2. The proton beam from the PS is horizontal and enters the experiment from the right. The experiment is tilted so that the angle between the proton beam and the mercury-jet axis is 100 mrad. Liquid nitrogen will be used to cool the copper coils of the solenoid magnet to 80 K. The magnet, pulsed with a 5 MVA power supply, will deliver a 15 T field for a duration of 1 s. The mercury jet will be injected into the 15 cm diameter warm bore of the magnet and the beam-target interaction will be recorded through viewing ports by high-speed cameras via fibre-optic cables.

Short bunch trains containing between one and four bunches of  $5 - 7 \times 10^{12}$  protons will be extracted from the PS. If all four bunches are filled, a total of  $28 \times 10^{12}$  protons will impinge on the target within a  $2 \mu\text{s}$  spill giving a peak energy deposition of 180 J/g. By varying the pattern of filled proton bunches the experiment will also be able to study the effect of cavitation.

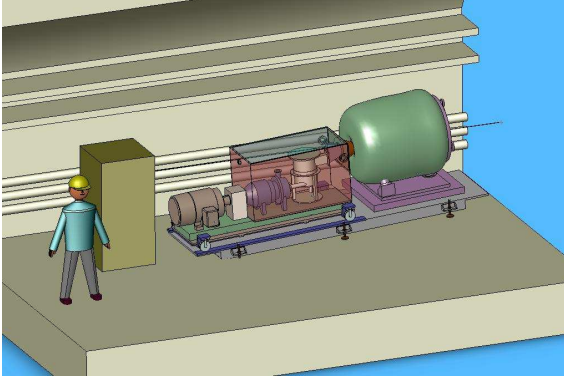


Figure 2. Schematic diagram of the MERIT experiment at the neutron time-of-flight (nToF) facility at CERN [47].

### 3.3. Ionisation cooling

The muon beam that emerges from the decay channel fills a large phase space. For example, in US Study II the transverse emittance at the exit of the decay channel is 12 mm [3]. The spread of the muons in the longitudinal phase space is also very large ( $\sim 60$  mm in Study II). Efficient, cost effective, acceleration of the muon beam requires that the phase space be modified. The phase-rotation and bunching systems that follow the decay channel are required to produce a beam with an energy spread of  $\sim 60$  MeV which is appropriately bunched to match the subsequent cooling sections.

Each of the five Neutrino Factory conceptual design studies have considered the benefit of reducing the emittance of the muon beam (cooling) before injecting it into the acceleration and storage systems. There are two principal motivations for this: to increase the number of muons inside the acceptance of the downstream accelerators; and to keep the cost of the muon acceleration system to a minimum.

At the end of the decay channel, the muons have a momentum of roughly 200 MeV/c. The time-dilated lifetime of the muon is short ( $\sim 4.7\mu\text{s}$ ) making it essential that cooling and acceleration take place as rapidly as possible. Ioni-

sation cooling, a process in which the muon beam is caused to pass through an alternating series of liquid-hydrogen absorbers and accelerating RF-cavities, is the technique by which it is proposed to cool the muon beam prior to acceleration. Various ‘gain factors’ have been defined to quantify the gain in performance due to the cooling channel (see table 1). Systems that give gain factors of between 2 and 10 have been devised. Since a factor of  $\Gamma$  gain in stored muon-beam intensity implies a reduction, by a factor  $\Gamma$ , in the running time required to achieve a particular total neutrino flux, and a decrease in emittance of the muon beam entering the acceleration section is likely to lead to significantly lower costs for muon acceleration, it will be important to make a careful optimisation, for performance and cost, of the cooling and acceleration systems. The engineering demonstration of the ionisation-cooling technique will be carried out by the international Muon Ionisation Cooling Experiment (MICE) collaboration [48]. The MICE experiment, which has been approved, will take place at the Rutherford Appleton Laboratory (RAL), using muons produced by the ISIS 800 MeV proton synchrotron. The status of the experiment is reviewed in the paragraphs that follow.

#### 3.3.1. The international Muon Ionisation Cooling Experiment

The principal components of the MICE experiment are shown in figure 3. Two, functionally equivalent, spectrometers are placed upstream and downstream of a single lattice cell of the Study II cooling channel. In the Study II design approximately  $10^{14}$   $\mu/s$  pass through the channel. The lateral dimensions of the beam are such that space-charge forces can be ignored making it possible to run MICE as a single particle experiment in which the Neutrino Factory bunch is reconstructed offline using an ensemble of particles recorded in the experiment. At the nominal input emittance of  $\epsilon_{\text{in}} = 6\pi$  mm a cooling effect ( $\epsilon_{\text{out}}/\epsilon_{\text{in}} - 1$ , where  $\epsilon_{\text{out}}$  is the output emittance) of  $\sim 10\%$  is expected. The cooling effect will be measured with a precision of 1% (i.e.  $(\epsilon_{\text{out}}/\epsilon_{\text{in}} - 1)$  will be measured with an absolute precision of 0.1%).

Table 1  
Survey of the gain afforded using ionisation cooling in a number of conceptual design studies of the Neutrino Factory.

Design	Number of cooling cells	Gain factor per cell (%)	Cooling	Comment
Study II [3]	26	6	7	Increase in phase-space density in acceptance of downstream accelerator.
Study IIa [4]	26	2	2	Increase in number of muons in acceptance of subsequent muon acceleration section.
CERN [5]	36	10	7	Increase in muon yield at 2 GeV over optimised Neutrino Factory without cooling.
NuFact-J [6]	–	1.5 – 2	–	Acceleration based on FFAGs. Performance improvement when absorber is included in FFAG ring giving 6D cooling effect.

The MICE cooling channel consists of three absorber/focus-coil (AFC) modules and two accelerating-cavity/coupling-coil (RFCC) modules. The AFC modules each contain a 21 l liquid-hydrogen absorber inside a pair of superconducting coils that bring the beam to a focus in the centre of the absorber. Liquid hydrogen is the most efficient ionisation-cooling material because it has a large specific ionisation and a comparatively large radiation length. Safe operation of the system in the presence of liquid hydrogen leads to significant engineering constraints. The AFC modules and the hydrogen system each have both active and passive safety systems. The hydrogen will be stored in the form of metal hydride when the absorber is emptied. A vigorous R&D programme is underway to demonstrate the safe operation of the hydrogen system. The superconducting coils and the liquid-hydrogen vessel itself are refrigerated using closed-cycle ‘cryo-coolers’ [49].

The RFCC module must restore the energy lost by the muons as they pass through the absorber. The coupling coil, a short, large diameter solenoid, provides the magnetic field that transports the muons through the module. The acceleration is produced by four 201 MHz copper cavities which produce a gradient of 8 MV/m. To pro-

duce the required field gradient, the cavities must be electrically closed, yet, to preserve the cooling effect, the amount of material through which the beam passes must be minimised. Thin beryllium windows have been developed for this purpose. The degree of emission from the cavity surfaces is significantly enhanced by the Lorentz force produced by an intense magnetic field [50]. While reducing the field emission in a Neutrino Factory cooling channel, in which the cavities must operate at 16 MV/m, is a challenging problem, it has been estimated that for operation in MICE, the emission can be kept within acceptable bounds.

The muon beam that enters the experiment may contain a small pion contamination. The instrumentation upstream of the cooling channel is therefore required to distinguish pions from muons and to measure the phase space coordinates of the muons entering the channel. Downstream of the cooling channel, the instrumentation is required to identify electrons produced in the channel by muon decays and to measure the muon phase-space coordinates. The upstream particle identification will be performed using a scintillator-based time-of-flight (TOF) system and a threshold Cherenkov counter. The TOF system will also be used to trigger the experiment and to determine the phase of the RF fields



Figure 3. Drawing of the MICE experiment [48]. The beam enters the experiment from the bottom left-hand corner. The beam first passes through one of the scintillator hodoscopes that form the time-of-flight system. After passing through the upstream spectrometer, the beam passes through three absorber/focus-coil modules and two cavity/coupling-coil modules before it passes through the downstream spectrometer and, a second time-of-flight hodoscope, the downstream Cherenkov counter and is stopped in the electromagnetic calorimeter. The beamline and upstream instrumentation is not shown.

in the cavities as the muon traverses the experiment. The upstream and downstream spectrometers are each composed of a 4 T superconducting solenoid instrumented with a scintillating-fibre tracking device. Downstream of the cooling channel a final TOF station, a Cherenkov counter and a calorimeter are used to distinguish muons and electrons.

The MICE collaboration will take enough data to make the uncertainty on the measured cooling effect systematics limited. It is therefore crucial that the systematic errors are understood in detail. To do this, the experiment will be built up in stages. A first measurement of cooling, using the two spectrometers and one AFC module, is scheduled for 2008. The first RFCC module and a second AFC module will then be installed and the full MICE cooling channel will be assembled in 2009.

The MICE experiment will be mounted on ISIS

at the CCLRC Rutherford Appleton Laboratory. The preparation of the MICE Muon Beam on ISIS, the MICE Hall and the first phase of the MICE experiment is proceeding to schedule. The first data-taking period, in which the muon beam will be characterised, the instrumentation calibrated and the relative systematics of the two spectrometers will be measured, will begin in April 2007.

### 3.4. Acceleration and storage

The short lifetime of the muon leads to the requirement that the acceleration be as rapid as possible. Past studies have considered recirculating linear accelerators in various topologies. More recently it has been proposed that fixed field alternating gradient (FFAG) accelerators may offer advantages [51]. Unlike conventional synchrotrons, the magnets within the FFAG are not ramped with the consequence that



the radius of the particle orbit increases during acceleration. The radial profile of the magnet pole-pieces is carefully designed to give a field that varies with radius so as to produce the same focussing effect for all momenta. Several ‘scaling’ FFAGs, in which the magnetic field scales with radius, have been built in Japan [52]. The scaling FFAG programme is reaching maturity with the machine proposed for the PRISM experiment [53]. An alternative to the scaling FFAG is the ‘non-scaling’ FFAG [54]. In a non-scaling machine the magnets are standard quadrupoles or combined-function dipoles. However, the settings are carefully optimised so as to reduce the radial displacement of the beam during acceleration. An international collaboration (EMMA) is developing a proposal to construct a proof-of-principle non-scaling FFAG [55].

Progress has also been made in developing schemes for the storage ring, the design of which is complicated by the need to serve two or more detectors at different long base-lines [56]. To fully engineer the storage ring will require that the power radiated from the muon beam in the form of decay electrons and bremsstrahlung photons be dealt with using appropriate absorbers.

The experience gained in the construction of PRISM and EMMA and in the design of the storage rings themselves will be important input to a future Neutrino Factory design study in which the cooling, acceleration and storage systems will have to be optimised together for performance and cost.

#### 4. Conclusions

A programme of precision measurement of the properties of the neutrino is important because the measurements may lead to the discovery of CP violation in the lepton sector and of the physical principles that explain the tiny neutrino masses and the very large neutrino mixing angles can. It is likely that these measurements will have a profound impact in astro-physics and cosmology, well beyond the confines of particle physics. The Neutrino Factory offers better sensitivity and precision than other second generation facilities, and the accelerator systems required are being

developed by an energetic international community. The time is therefore right for the Neutrino Factory community to take the next bold step, to produce a conceptual design report by the end of the decade. If the community is successful in establishing the conceptual design around the end of the decade and the results of the present generation of experiments confirms that the Neutrino Factory is needed, then the case to expedite the construction of the Neutrino Factory will be very strong indeed.

#### Acknowledgements

I would like to thank the organisers for giving me the opportunity to present this review. I gratefully acknowledge the help, advice, and support of my many colleagues within the international Neutrino Factory community who have freely discussed their results with me and allowed me to use their material.

#### REFERENCES

1. S. Geer, *Phys. Rev. D* 57 (1998), 6989. [Erratum-ibid. *D* 59 (1999), 039903].
2. D. Finley, N. Holtkamp, eds, “Feasibility Study on a Neutrino Source Based on a Muon Storage Ring”, (2000). See [http://www.fnal.gov/projects/muon\\_collider/reports.html](http://www.fnal.gov/projects/muon_collider/reports.html).
3. S. Ozaki, R. Palmer, M. Zisman, and J. Gallardo, eds, “Feasibility Study-II of a Muon-Based Neutrino Source”, BNL-52623, June 2001.
4. C. Albright et al, “Neutrino Factory and Beta Beam Experiments and Development”, BNL-72369-2004, FNAL-TM-2259, LBNL-55478. See <http://www.cap.bnl.gov/mumu/study2a/> and <http://www.cap.bnl.gov/mumu/studyii/FS2-report.html>.
5. A. Blondel, ed, “ECFA/CERN studies of a European neutrino factory complex”, CERN-2004-022, <http://preprints.cern.ch/cernrep/2004/2004-002/2004-002.html>.
6. NuFactJ working group, “A Fea-

- sibility Study of A Neutrino Factory in Japan". See <http://www-prism.kek.jp/nufactj/nufactj.pdf>
7. A. Blondel et al. eds., "Workshop on physics with a Multi MW proton source", CERN-SPSC-2004-024, SPSC-M-722. See <http://physicsatmwatt.web.cern.ch/physicsatmwatt/>.
  8. M.G. Albrow et al., "Physics at a Fermilab Proton Driver", hep-ex/0509019.
  9. P. Zucchelli, Phys. Lett. B 532 (2002), 166.
  10. See for example, B. Kayser, "Neutrino mass, mixing, and flavor changes" in "The review of particle physics", Eidelman et al., Phys. Lett. B592, 1 (2004).
  11. S.J. Brice, MiniBooNE Collaboration, Nucl. Phys. Proc. Suppl. 143, (2005), 115.
  12. A. Strumia, Phys. Lett. B 539, (2002), 91.
  13. O.L.G. Peres and A.Y. Smirnov, Nucl. Phys. B 599 (2001), 3.
  14. B. Armbruster et al., KARMEN Collaboration, Phys. Rev. D65 (2002), 112001.
  15. A. Aguilar et al., LSND Collaboration, Phys. Rev. D 64, (2001), 112007.
  16. B. Aharmim et al., SNO Collaboration, arXiv:nucl-ex/0502021.
  17. Q. R. Ahmad et al., SNO Collaboration, Phys. Rev. Lett. 89 (2002), 011301.
  18. T. Araki et al., KamLAND Collaboration, Phys. Rev. Lett. 94 (2005), 081801.
  19. K. Eguchi et al., KamLAND Collaboration, Phys. Rev. Lett. 90 (2003), 021802.
  20. S. Fukuda et al., Super-Kamiokande Collaboration, Phys. Lett. B 539 (2002), 179.
  21. Y. Ashie et al., Super-Kamiokande Collaboration, Phys. Rev. Lett. 93 (2004), 101801.
  22. Aliu et al., K2K Collaboration, Phys. Rev. Lett. 94 (2005), 081802.
  23. E. Ables et al., MINOS Collaboration, "P-875: A Long baseline neutrino oscillation experiment at Fermilab", FERMILAB-PROPOSAL-0875.
  24. R. Saakian, MINOS Collaboration, Phys. Atom. Nucl. 67 (2004), 1084 [Yad. Fiz. 67 (2004), 1112].
  25. M. Guler et al., OPERA Collaboration, CERN-SPSC-2000-028.
  26. P. Cennini et al., ICARUS Collaboration, "ICARUS II: A Second generation proton decay experiment and neutrino observatory at the GRAN SASSO laboratory: Proposal", ICARUS-PROPOSAL (Sep 1993).
  27. F. Arneodo et al., ICARUS Collaboration, "The ICARUS Experiment: A Second generation proton decay experiment and neutrino observatory at the GRAN SASSO laboratory:" LNGS-P28-2001, (Mar 2001), arXiv: hep-ex/0103008.
  28. Y. Itow et al., "The JHF-Kamioka neutrino project", hep-ex/0106019.
  29. Y. Hayato, T2K Collaboration, Nucl. Phys. Proc. Suppl. 143, 269 (2005).
  30. D.S. Ayres et al., NOvA Collaboration, "NOvA proposal to build a 30-kiloton off-axis detector to study neutrino oscillations in the Fermilab NuMI beamline", hep-ex/0503053.
  31. See for example, S. Brice et al., Nucl. Phys. Proc. Suppl. 149:111-118, 2005.
  32. The WWW page for the international scoping study of a future Neutrino Factory and super-beam facility can be found at <http://hepunix.rl.ac.uk/uknf/wp4/scoping>.
  33. ISS/2005/01, "An international scoping study of a Neutrino Factory and super-beam facility", [http://www.hep.ph.ic.ac.uk/iss/iss-notes/ISS\\_Doc1\\_v02\\_13-7-2005.pdf](http://www.hep.ph.ic.ac.uk/iss/iss-notes/ISS_Doc1_v02_13-7-2005.pdf).
  34. S. Brookes, "Computed Pion Yields from a Tantalum Rod Target", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005.
  35. M.A. Clarke-Gayther et al., Nucl. Phys. B (Proc. Suppl.) 149 (2005) 323-325.
  36. S. Machida, "Proton driver: the evolution of J-Parc", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005;  
G. Apollinari, "Proton driver: prospects in US", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26,

- 2005;
- R. Garoby, "Proton driver: prospects in Europe", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005.
37. J.R.J Bennett, Nuclear Physics B (Proc. Suppl.) 149 (2005) 262.
  38. H. Kirk, "High-Power Targets and Particle Collection", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005.
  39. M.G. Catenesi et al., "Proposal to study hadron production for the neutrino factory and for the atmospheric neutrino flux", CERN-SPSC/99-35, SPSC/P315. For more details of the experiment see the HARP home page at <http://harp.web.cern.ch/harp/>.
  40. Y. Fisyak et al., the MIPP collaboration, "P-907: Proposal to Measure Particle Production in the Meson Area Using Main Injector Primary and Secondary Beams", proposal to FNAL PAC, [http://ppd.fnal.gov/experiments/e907/Proposal/P00\\_Proposal.pdf](http://ppd.fnal.gov/experiments/e907/Proposal/P00_Proposal.pdf).
  41. E. Radicioni, "Hadron production cross sections", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005.
  42. J.R.J Bennett, et al., "Solid target studies in the UK", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005.
  43. Livermore Software Technology Corp. <http://www.lstc.com/>.
  44. H. Kirk et al, "Target Studies with BNL E951 at the AGS", proceedings of the Particle Accelerator Conference, PAC01, Chicago, 2001; A. Fabich et al, J. Nucl. Mater. 318 109-112; J. Lettry et al., J. Phys. G: Nucl. Part. Phys. 29 (2003) 1621-1627.
  45. J. Lettry and E. Robert, "Non cylindrical symmetric Shocks in liquid jets", presentation to the BENE Target Working Group, 15<sup>th</sup> March 2005, <http://hepunix.rl.ac.uk/uknf/wp3/bene/2005-03-16/JacquesLettry-ENGMarch05.pdf>.
  46. R. Samulyak, "Target Simulations", presentation to the Muon Technical Advisory Committee, 25-26 April 2005, <http://www.cap.bnl.gov/mumu/conf/MUTAC-050425/talks/Samulyak.pdf>.
  47. J.R.J. Bennett et al., "Studies of a Target System for a 4-MW, 24 GeV Proton Beam", proposal to the CERN INTC Committee, INTC-P-186, (April 26, 2004), [http://puhep1.princeton.edu/mumu/target/cern\\_proposal.pdf](http://puhep1.princeton.edu/mumu/target/cern_proposal.pdf).
  48. G. Gregoire et al., the MICE collaboration, "MICE, an international Muon Ionisation Cooling Experiment: proposal to the Rutherford Appleton Laboratory", submitted to CCLRC and PPARC on the 10th January 2003: <http://hep04.phys.iit.edu/cooldemo/micenotes/public/pdf/MICE0021/MICE0021.pdf>.
  49. <http://www.janis.com/p-a4k10.html>.
  50. J. Norem, "Breakdown in RF cavities", TPPT025, paper contributed to PAC05, the Particle Accelerator Conference, Knoxville, Tennessee, USA, 16 - 20 May 2005.
  51. J. Scott Berg et al., "FFAGs for Muon Acceleration," PAC03, p. 3413.
  52. M.Aiba et al., "Development of a FFAG proton synchrotron", Proceedings of European Particle Accelerator Conference (EPAC2000) pp581-583 (2000); T.Adachi et al., "A 150mev FFAG synchrotron with a return-yoke free magnet", Proceedings of Particle Accelerator Conference (PAC2001) pp3254-3256 (2001); S.Machida et al., "Status of 150 MeV FFAG synchrotron", Proceedings of the 2003 Particle Accelerator Conference (PAC2003) pp3452-3454 (2003).
  53. The PRISM Working Group, "The PRISM Project - A Muon Source of the World-Highest Brightness by Phase Rotation",

submitted to J-PARC Letter of Intent L24, unpublished, <http://www-ps.kek.jp/jhfnp/LOIlist/LOIlist.html>.

54. C. Johnstone and S. Koscielniak, Workshop on High Intensity and High Brightness Hadron Beams (HB2002); W. Chou et. al. eds. AIP Conference Proceedings, p. 207 (2002).
55. R. Edgecock for the EMMA Collaboration, contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005.
56. F. Meot, "The acceleration of muons in the Neutrino Factory", contributed paper to the 7<sup>th</sup> International Workshop on Neutrino Factories and Superbeams, NuFact05, Laboratori Nazionali di Frascati, Frascati (Rome), June 21 - 26, 2005.